

MVP - Control Panel Instructions

Contrast Adjustment and Time & Date Settings


Orenco's Most Versatile Panel (MVP) line of control panels includes an easy-to-use programmable logic unit that incorporates many timing and logic functions. The readability of the display may vary with temperature and ambient light. If the screen is difficult to read, adjusting the contrast is recommended. Instructions for adjusting the contrast are shown below. Setting the date and time is typically not necessary. However, if required, the time and date can be set by following the instructions shown on the next page.

To adjust the settings, use the four arrow keys located on the face of the unit (up, down, left, and right), along with the "ESC" key and the "OK" key. Follow the steps, below:

Changing LCD Settings:



Step 1: Press ▼ repeatedly until the display does not change. To begin the configuration process, press the "ESC" key.

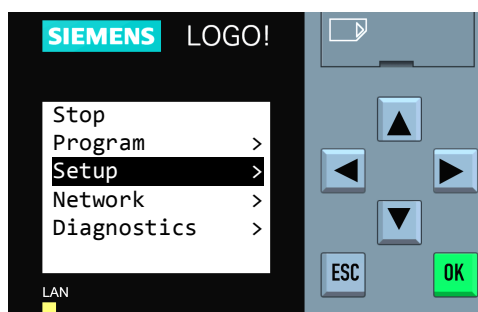


Step 2: Press ▼ twice to select "Setup". Then press the "OK" key.

Warning: Do not select "Stop". Doing so may erase the panel programming. If this is selected by accident, press the "ESC" key to cancel.



Step 3: Press ▼ three times to select "LCD" and then press "OK".

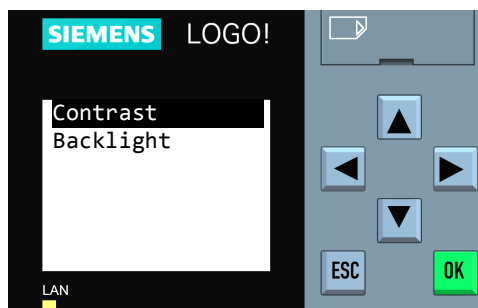

Step 4: Press "OK" to select "Contrast".



Step 5: To adjust the contrast, press ◀ or ▶. When finished, press the “OK” key.




Step 6: Exit by pressing the “ESC” key three times.

Setting Time and Date:




Step 1: Press ▼ repeatedly until the display does not change. To begin the configuration process, press the “ESC” key.

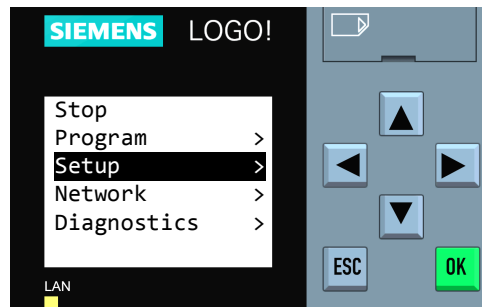

Step 2: Press ▼ twice to select “Setup”. Then press the “OK” key.


Warning: Do not select “Stop”. Doing so may erase the panel programming. If this is selected by accident, press the “ESC” key to cancel.

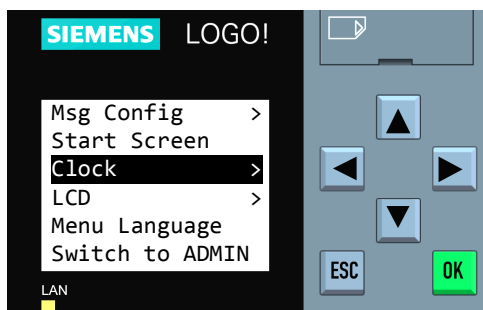

Step 3: Press ▼ twice to select “Clock” and then press “OK”.



Step 4: Press ▼ to select “Set Clock” and then press “OK”.

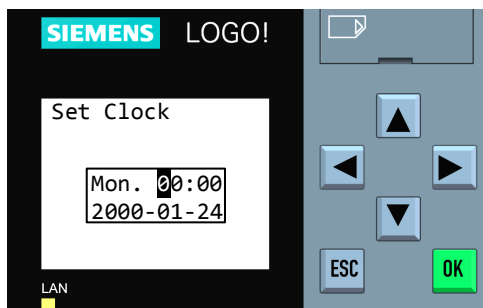

Step 5: To select the value to be changed, press ◀ or ▶. To change a value, press ▲ or ▼. When finished, press the “OK” key.

Note: Time is in military format.



Step 6: Exit by pressing the “ESC” key three times.