

SIMPLEX Control Panels

Three Phase, 200 volt, for Sewage, Effluent & Non-Clog Pumps




Enclosure Type 4X Polycarbon Circuit breaker For pump and control circuit Motor starter IEC rated with class 10 overload **HOA switch** Three position toggle HP rated Alarm switch Three position toggle HP rated Run light Amber neon pilot light Transformer With fuse protection Moisture sensor* Seal fail circuit and light Temp sensor* Heat sensor connections Bracket Bright aluminum **Fuse** Control and alarm sized at 3 amps **Terminal strip** Box type lugs sectional Wiring Color coded Visible alarm 360 degree flashing Audible alarm Piezo buzzer Level control Requires 3 floats rated at 2 amps Certifications UL 508A

* Requires sensor to be in pump.

Consult factory for other available options. Some options may require an increase in the enclosure size.

Volts	Phase	Amps	Part number
200	3	2.4 - 4	BP03S4XNM004
200	3	4 - 6	BP03S4XNM006
200	3	6 - 10	BP03S4XNM010
200	3	9 - 12	BP03S4XNM012
200	3	10 - 16	BP03S4XNM016
200	3	16 - 18	BP03S4XNM018
200	3	18 - 24	BP03S4XNM024
200	3	24 - 32	BP03S4XNM032
200	3	32 - 40	BP03S4XNM040

NOTE: Overloads must be located in pump.

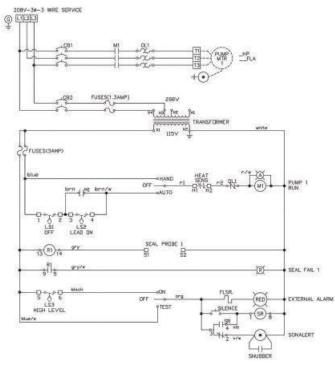



SPECIFICATIONS