

# Foot Valve

Sizes 3/4" / 20 mm


Model 60SE

**FLOMATIC®**

Flomatic Corporation

## Materials

Enviro Check®

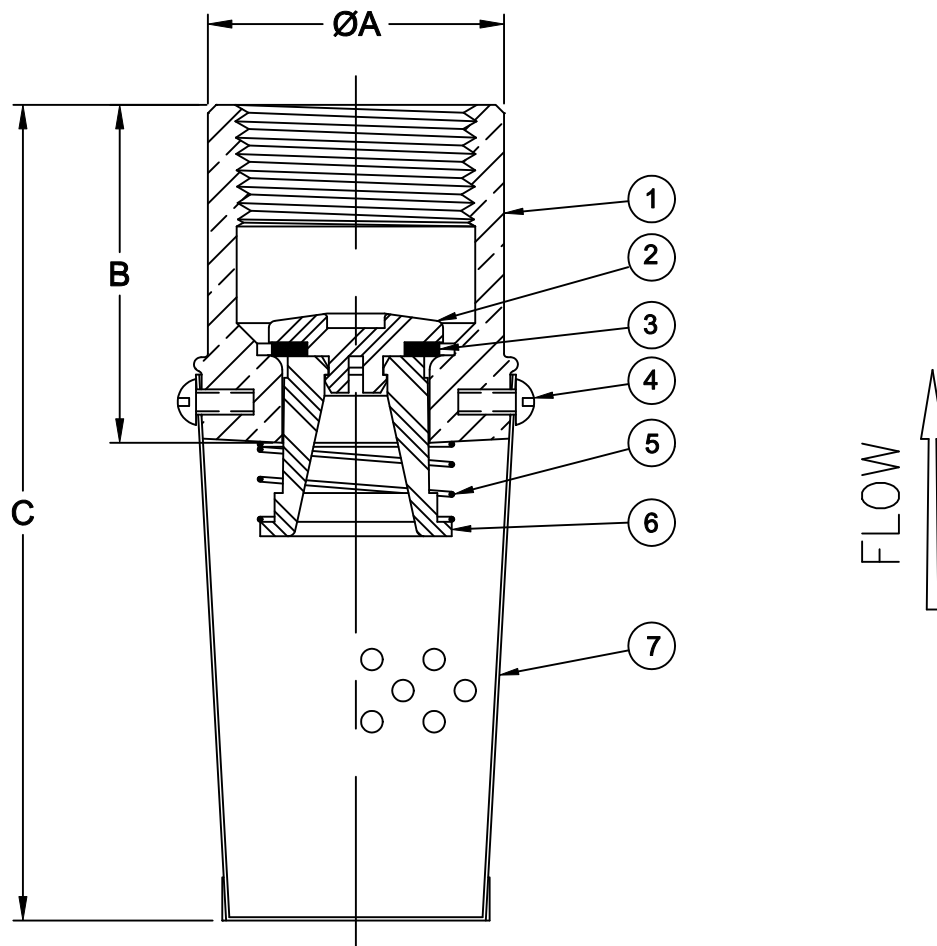

Open Area: 30-40%  
Max Temp 180°F (82°C)  
Max Pressure 250psi (18bar)

Item #	Qty	Description	Material	ASTM
1	1	Body	Unleaded Bronze	C89833
2	1	Poppet	Hostaform	-----
3	1	Seal	Buna-n	-----
4	2	Screw	Stainless Steel	18-8
5	1	Spring	Stainless Steel	18-8
6	1	Guide	Hostaform	-----
7	1	Screen	Stainless Steel	304

## Dimensions

Size		Part #	A		B		C		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
3/4	20	4100E	1-19/64	33	1-15/32	37	3-35/64	90	5/16	.14

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.

**FLOMATIC®** VALVES

March 4, 1991  
Dwg No: S4100E Rev D (8/11)

FLOMATIC CORPORATION  
GLENS FALLS, N.Y. 12801  
PHONE (518) 761-9797  
FAX (518) 761-9798