

EFFLUENT PUMPS


2NFL & J-BE

- Corrosion-resistant design for long life
- Cost-effective wastewater systems
- Built-in overload protection


Description	High Head Filtered Effluent Pumps	
HP	1/2, 3/4, 1 & 1-1/2	
Maximum Capacity	50 GPM	189 LPM
Maximum Shut-off Head	48'	146.3 m
Discharge	2"	50.8 mm
Solids Handling	1/16"	1.6 mm
Volts	115 & 230	
Full Load Amps	6.0 - 13.1	
Phase	Single	
Cord Length	10', 30', 50' & 100'	
Switch Options	M	
Impeller Material	Acetal	
Housing Material	Stainless Steel and Composite	
Volute Material	Stainless Steel and Composite	
Warranty Years	1	




8 GPM - 2NFL

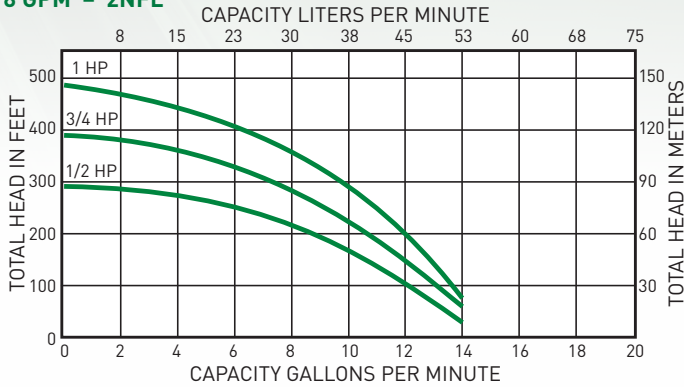


12 GPM - 2NFL

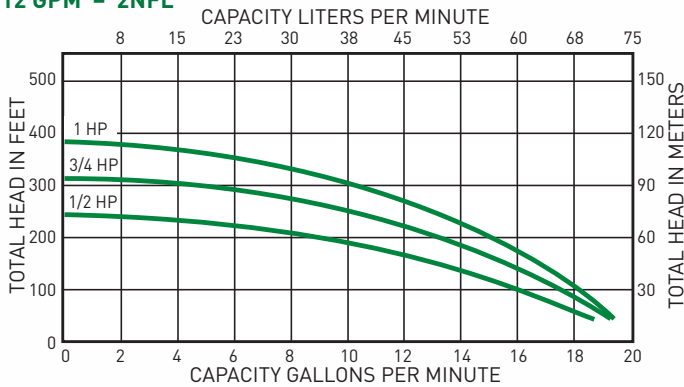

20 GPM - 2NFL

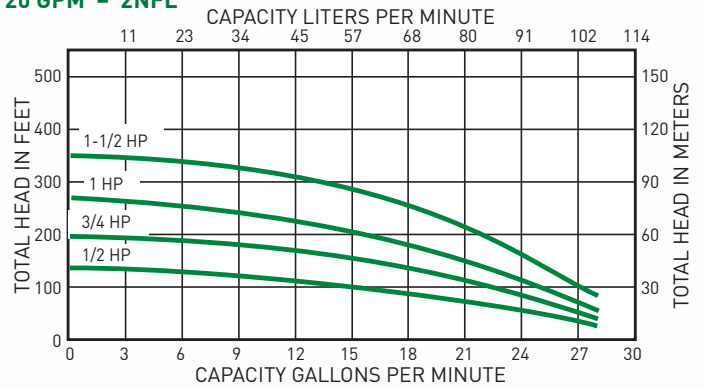

25 GPM - J-BE

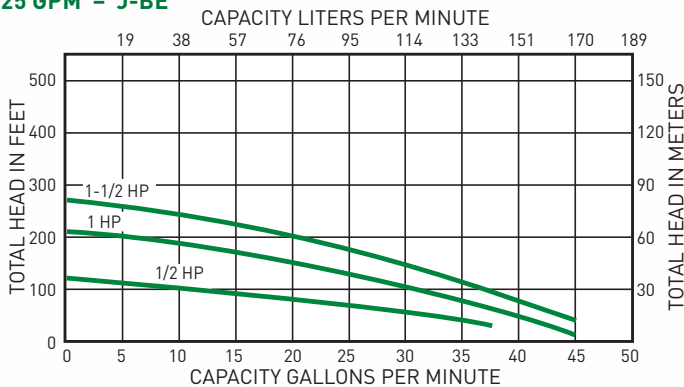

35 GPM - J-BE

