

# 5030CVSP 5030Cusp, & 5030Cusp25 Sump Pumps

With a rugged cast iron construction, the 5030CVSP, 5030Cusp, and 5030Cusp25 can handle up to 46 gallons per minute.

**Features:**


- Split Capacitor Motor - 3/10 HP continuous duty, thermal protected
- Lifts water up to 25' of vertical height
- 10' power cord, 25' cords are available for an additional charge
- Large 1 1/2" discharge for high capacity pumping
- Also available without a switch
- Non-clogging stainless steel impeller
- Vertical float switch





See Pumps & Accessories Price List for Limited Warranty details.



**Performance Curve**

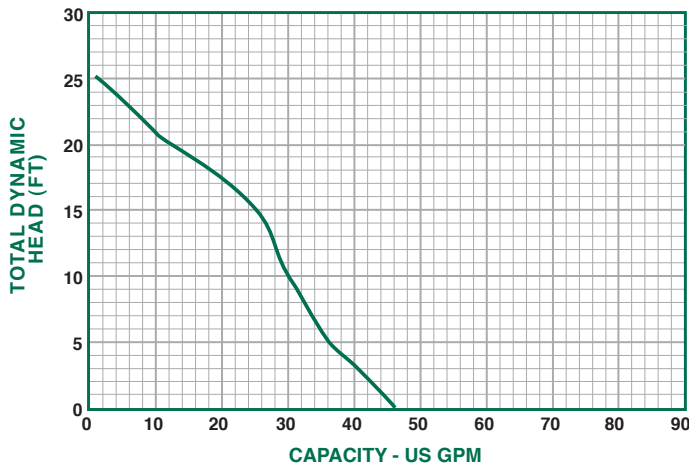

**Dimensions**

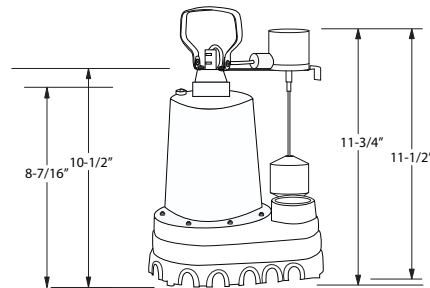

**Performance**

Model	Gallons per Minute in Feet					
5030Cusp	0	5	10	15	20	25
5030Cusp25	46	36	30	25	12	1
5030CVSP						

**Specifications**

Model No.	HP	Volts	Hz	Amps	Construction	Discharge Size	Cord Length	Solids Handling	RPM	Phase	Wt.
5030CVSP	3/10	120	60	4.1	Cast Iron	1 1/2"	10'	3/8"	3450	1	20
5030Cusp (NO SWITCH)	3/10	120	60	4.1	Cast Iron	1 1/2"	10'	3/8"	3450	1	18
5030Cusp25 (NO SWITCH)	3/10	120	60	4.1	Cast Iron	1 1/2"	25'	3/8"	3450	1	19

Sump, Sewage, & Effluent Pumps