

# SLIDE RAIL COUPLING SRC-2

To be used with  
2" sewage pumps.



## LOCATION

This SRC-2 is designed for wet wells, tanks, or lift stations where it is necessary to remove a pump from service and reinstall the pump without maintenance personnel entering the pit to unbolt the pump flanges.

## O-RINGS

Buna-N, 70 ±5 Duro.

## PAINT

Air dry enamel, water based.

## FEATURES

- ▶ 2" NPT pump connection.
- ▶ 2" NPT vertical discharge.
- ▶ 3/4" or 1" stainless steel guide rails (provided by installer).
- ▶ Stress-free rail system.
- ▶ Durable cast iron base and lift-out flange.
- ▶ Stainless steel pump adapter and guide plate.

## STATIONARY ELBOW

Cast iron ASTM A-48 class 30.

## MOVABLE FITTING

Ductile iron ASTM A-536.


## GUIDE RAIL CAP


**Bracket:** 304 stainless steel.

**Plugs:** ductile iron ASTM A-536-84.

## HARDWARE

304 series stainless steel.

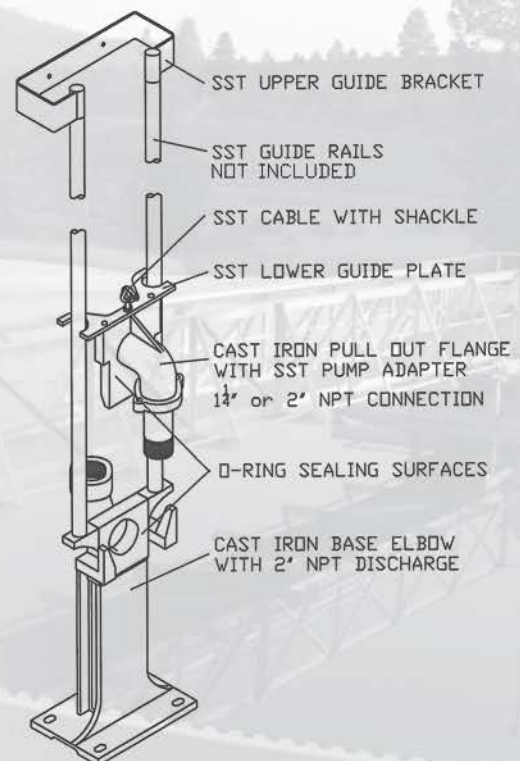

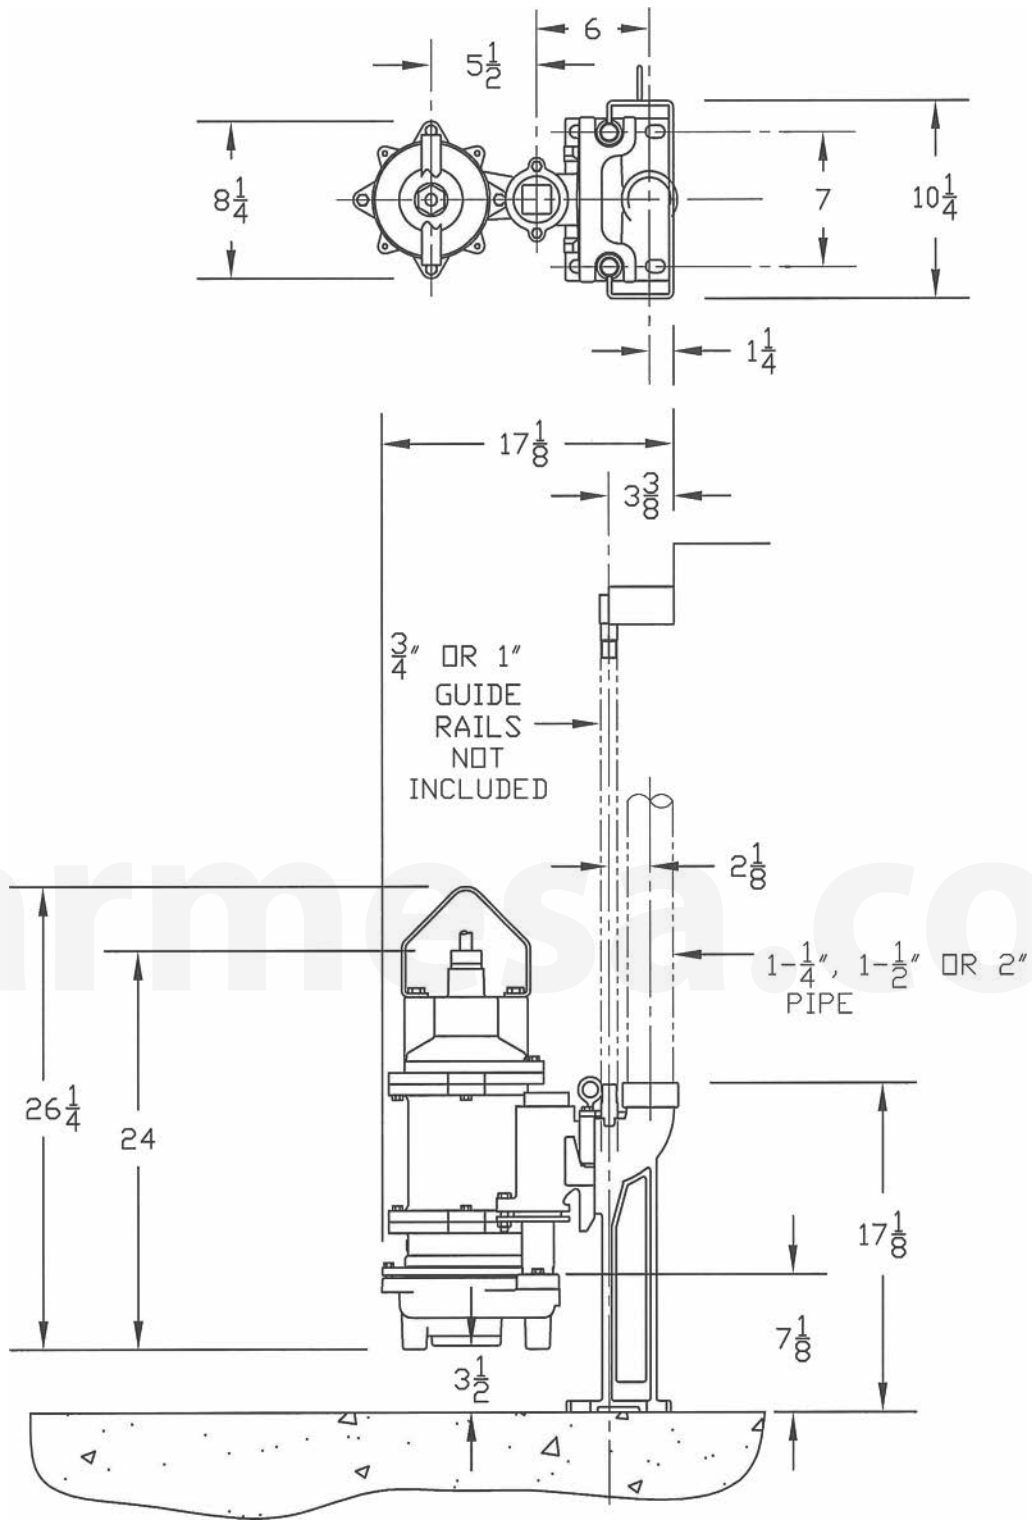

MODEL	PART No.	SIZE	RAILS	COUPLING	WEIGHT (pounds)
SRC200	62170805	2"	3/4" or 1"	w/ upper guide bracket	47