

Submersible Solids Handling Pumps

# SW series

7.5 - 125 HP



**Barmesa**<sup>®</sup>  
**Pumps**

**Barmesa Pumps**, manufacturer of **quality pumps since 1953**, introduces its new line of submersible solids handling pumps **SW series**.


In these times in which we are experiencing rising energy costs and energy shortages around the world, our goal is to offer **more sustainable** products. The SW pump line is part of our sustainability strategy to offer **efficient products** that drastically reduce energy consumption and carbon emissions.

To **better support** our trusted distributors, Barmesa Pumps introduces the SW line of pumps, a **highly developed and uncomplicated** line that guarantees trouble-free operation and withstands the toughest applications.

Thank you for choosing Barmesa Pumps!



# Barmesa SW series Premium Efficient Solids Handling Pumps, Designed for Longer Pump Life

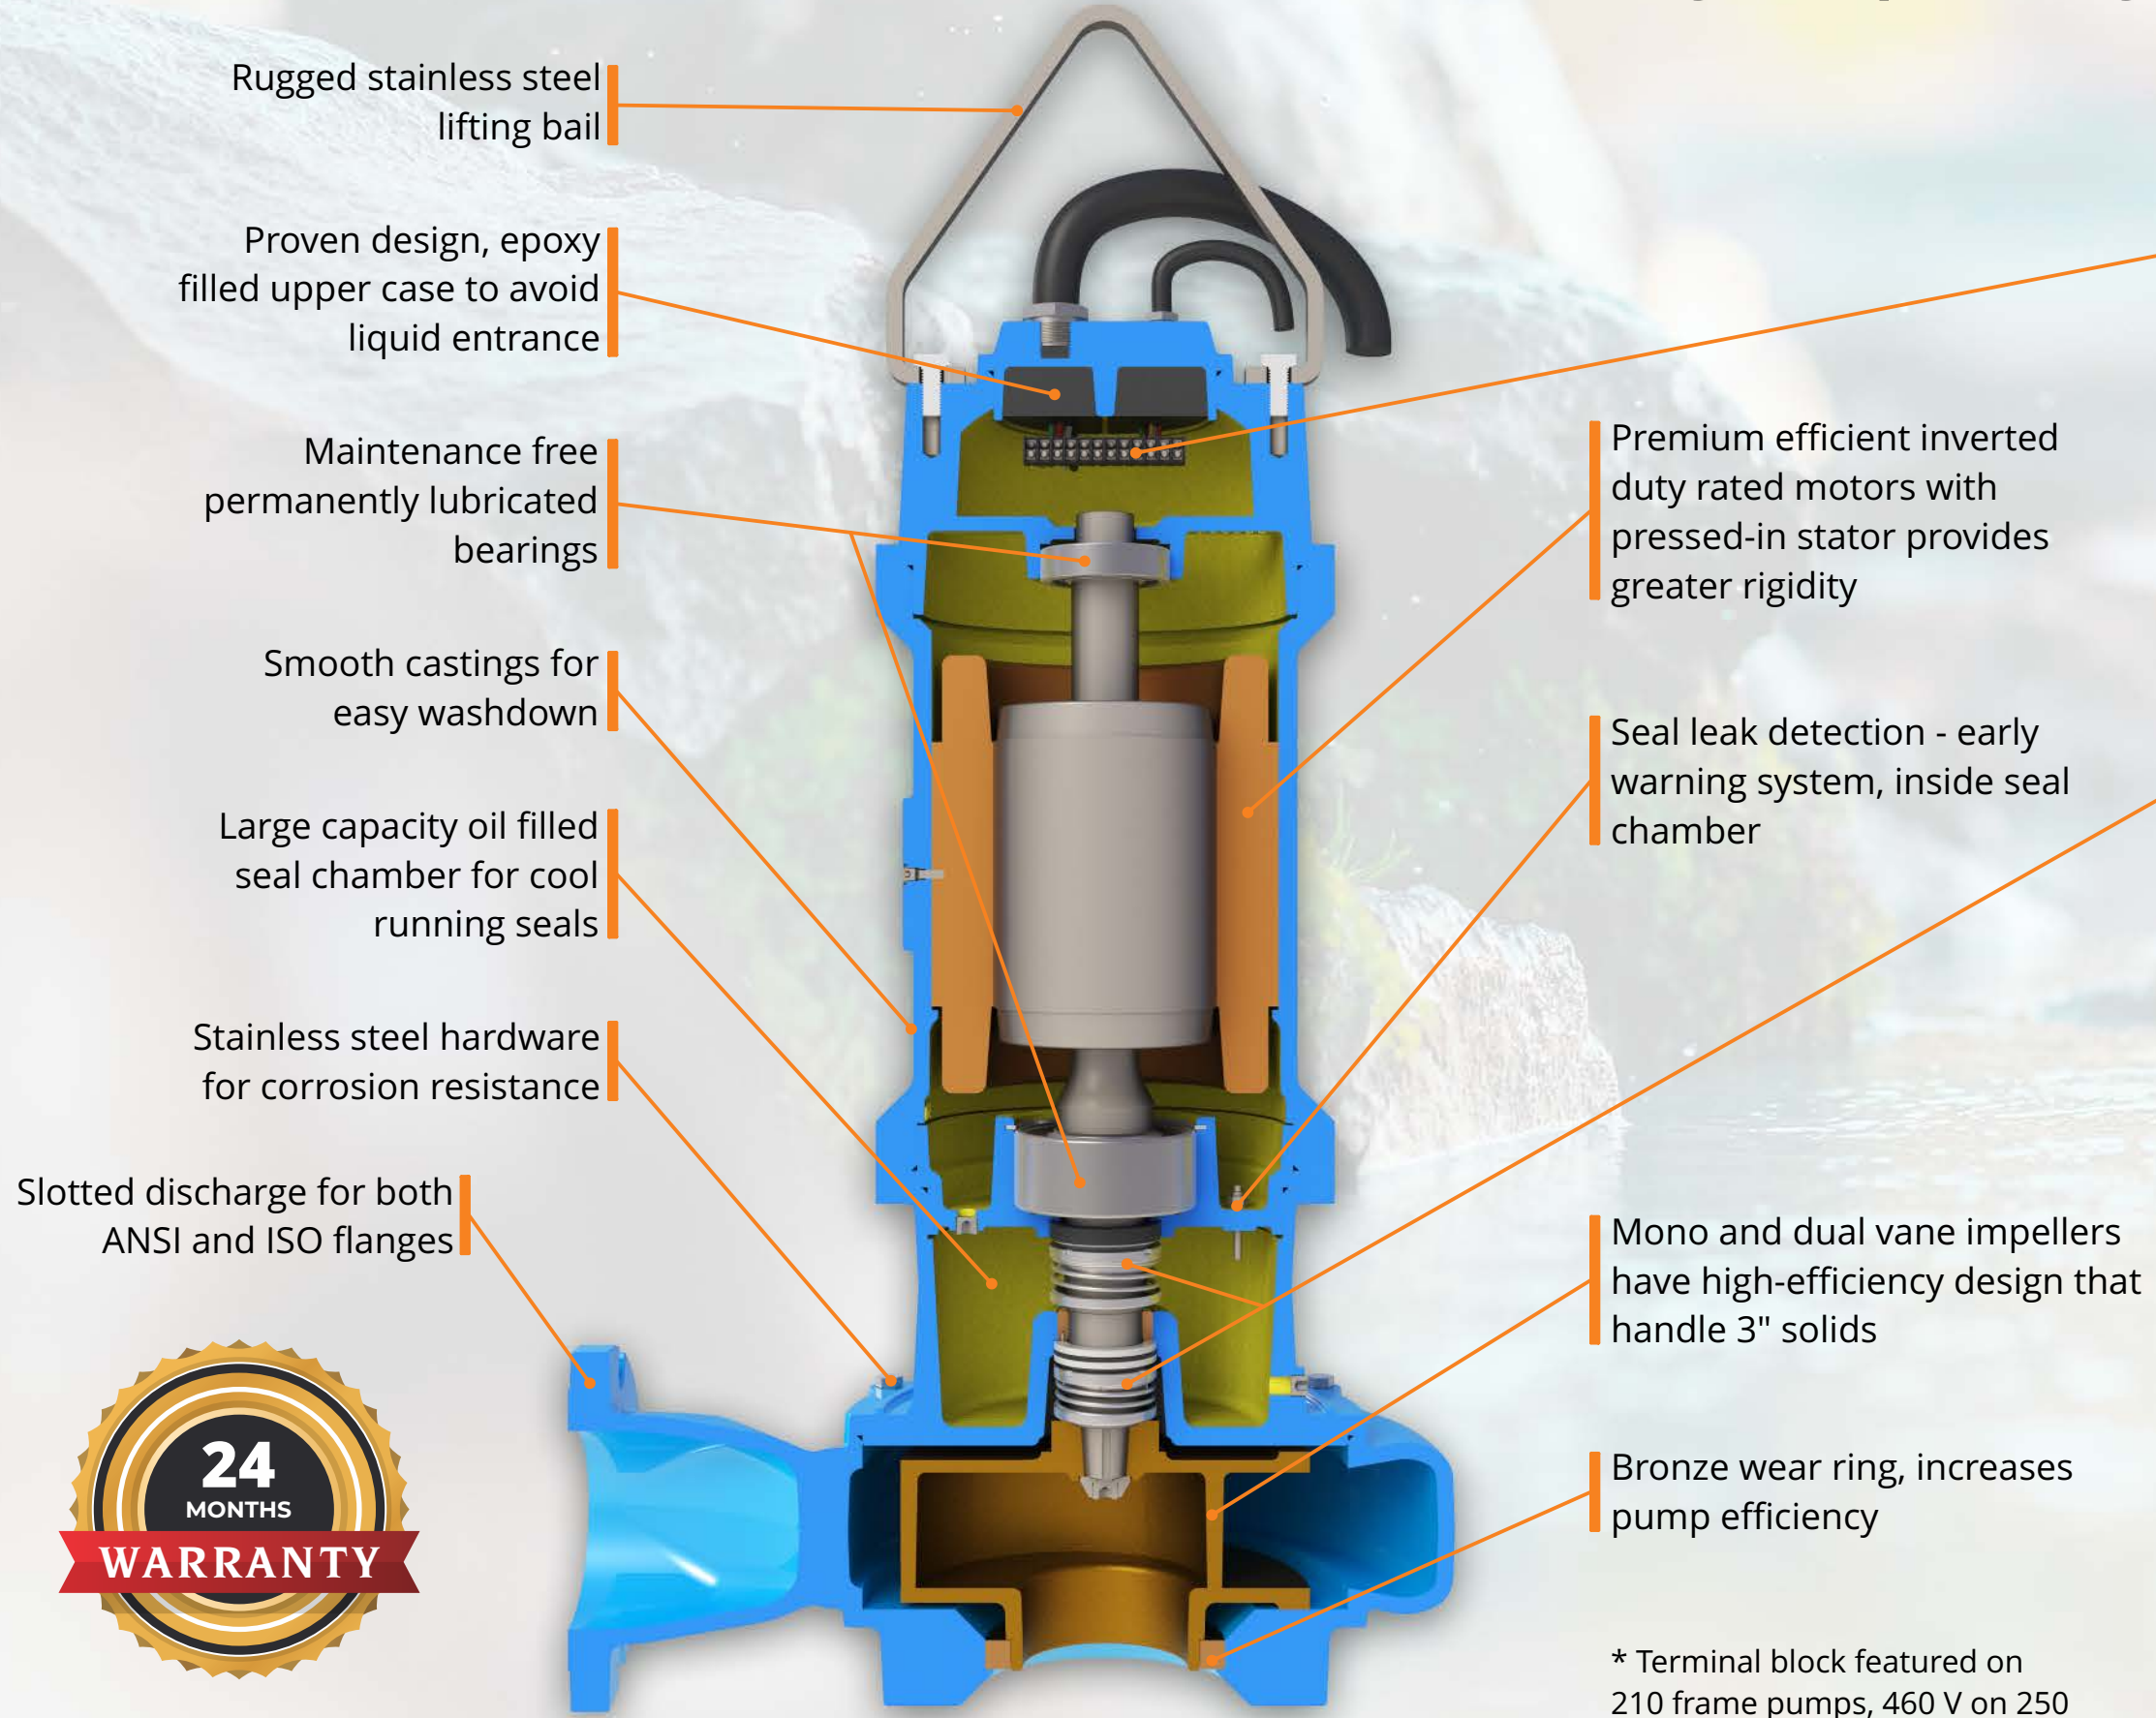

A terminal block\* for superior electrical connection without the need for wire nuts and crimp connectors; change of voltage is done easily

Double mechanical seal type 21, silicon carbide as standard






Features	Barmesa SW	Competition
Superior cooling	Oil-filled motor	Air filled motor
Ease of service	Standard type 21 mechanical seals	Proprietary cartridge seals
Continuous bearing lubrication	Continuously oil lubricated maintenance free bearings	Grease packed bearings
Motor moisture protection	Seal leakage detection probe in seal chamber	No probes or in motor housing
Epoxy filled connection cord chamber	Proven design prevents moisture to enter	Quick disconnect type design

\* Terminal block featured on 210 frame pumps, 460 V on 250 and 320 frame pumps.

# CHOOSE THE RIGHT SW PUMP

1. Use our pump selection software *PUMP-FLO*® at [www.BarmesaPumps.com](http://www.BarmesaPumps.com) to identify pumps that meet head and flow requirements.
2. Select the right pump based on efficiency and solids handling needs.

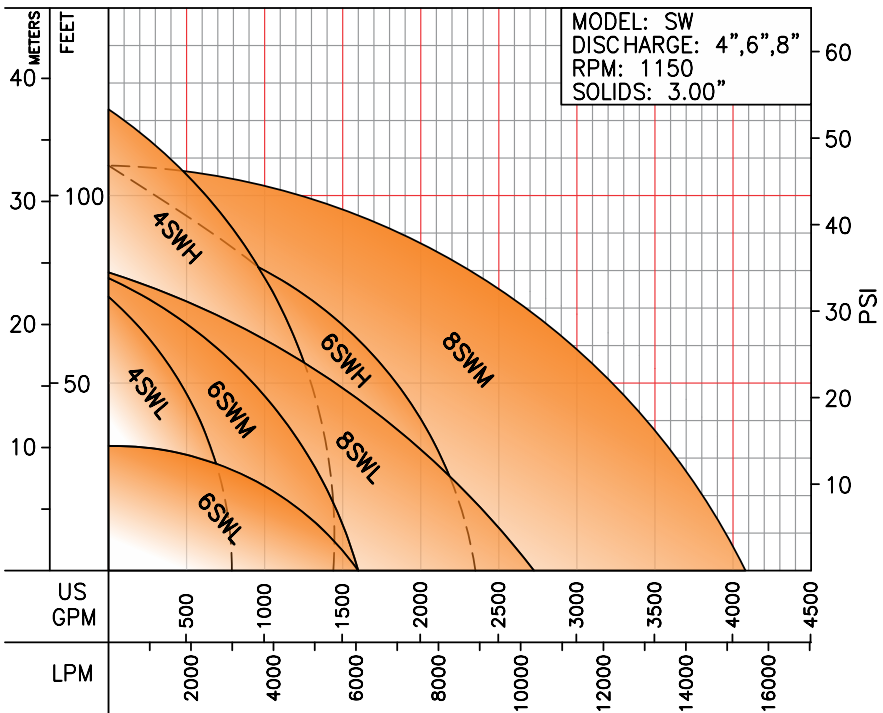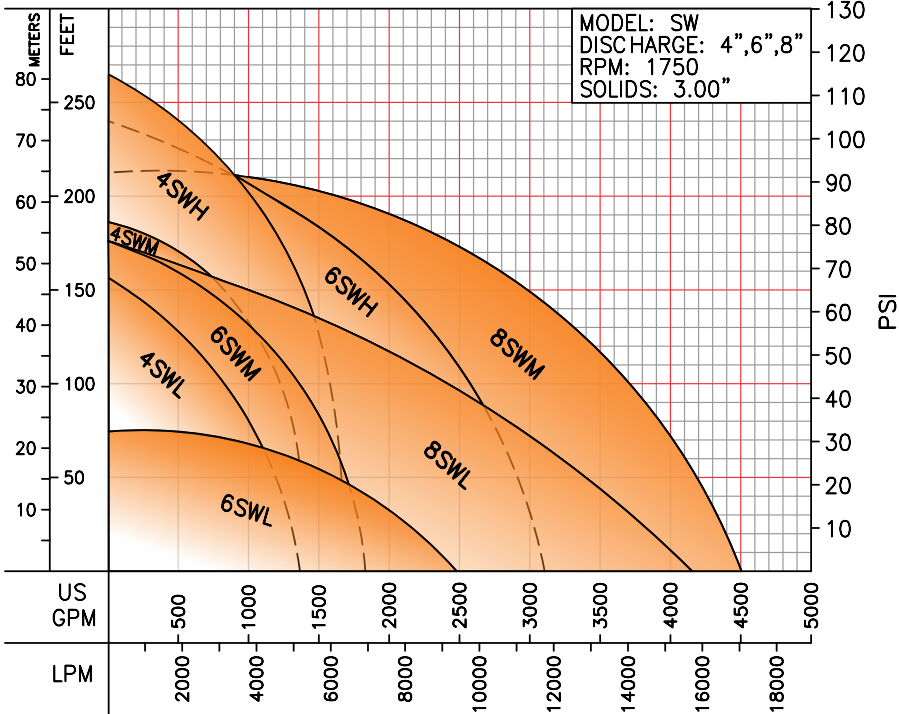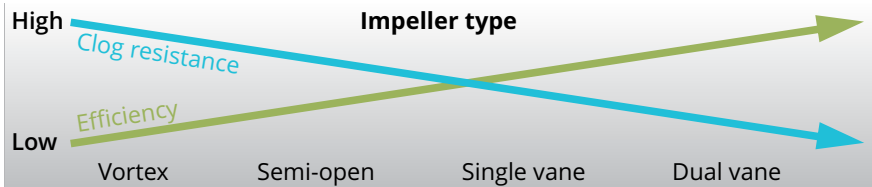

LIQUID: WATER  
SPECIFIC GRAVITY: 1.00  
TEMPERATURE: 70 °F (21 °C)  
MAXIMUM DIA. SOLIDS: 3.00"Ø

# Other submersible family pumps



We manufacture pumps since 1953, more than 65 years of experience designing pumps. Our products cover commercial, municipal and industrial markets.



Toll Free USA  
1-844-BARMESA (227-6372)



[contact@barmesapumps.com](mailto:contact@barmesapumps.com)



[www.barmesapumps.com](http://www.barmesapumps.com)



© Barmesa Pumps LLC. All rights reserved.

Product details shown here are subject to change without notice.