


4SE-HL – 15 HP

3" Spherical Solids Handling

BARNES®

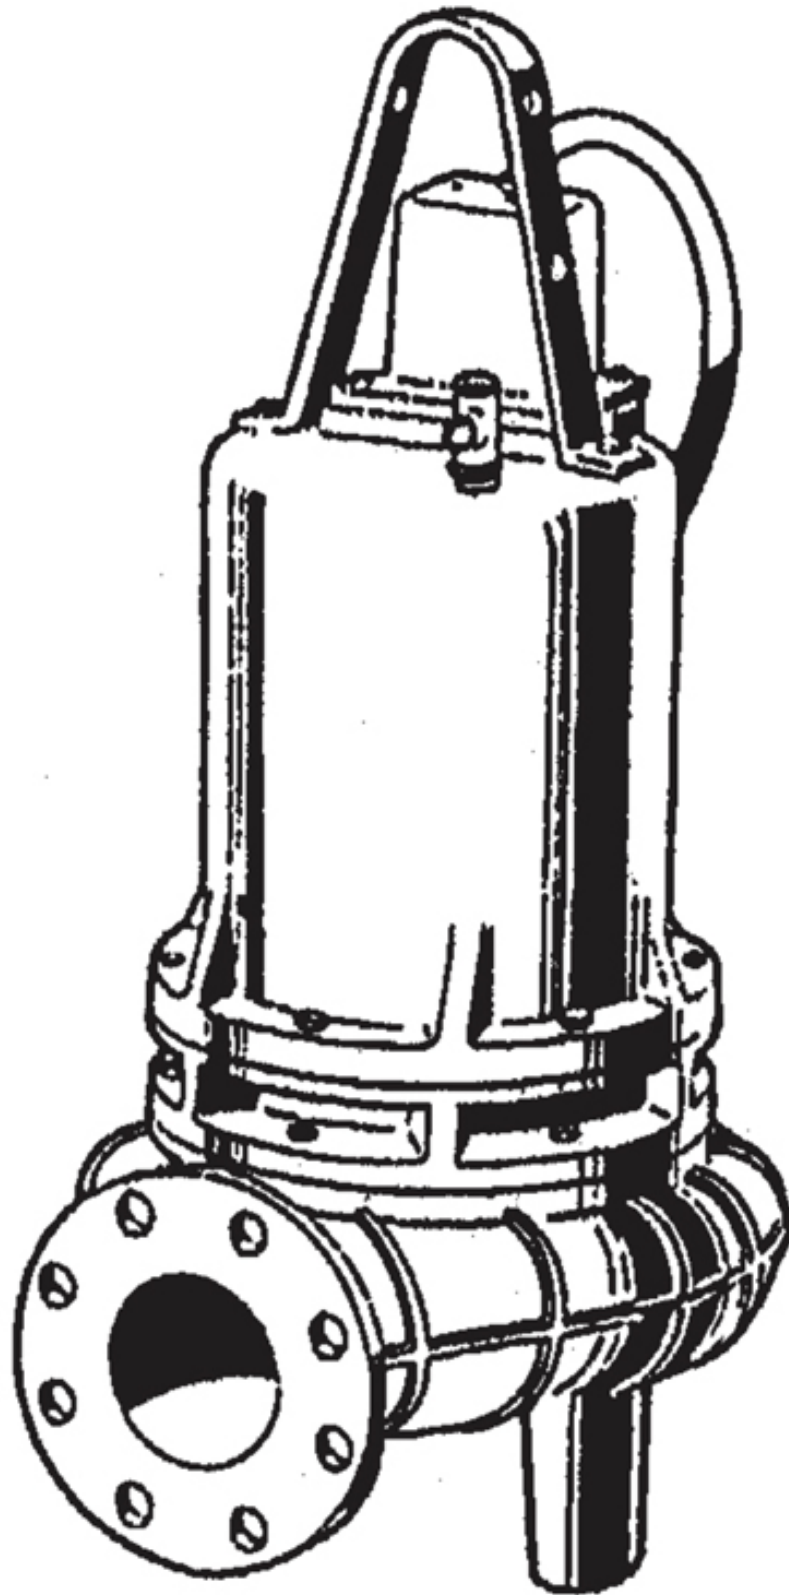

Specifications

DISCHARGE: 4" 125lb., horizontal flange

SPEED: 1750 RPM (Nominal)

IMPELLER:

- **Design:** 2 Vane, open with pump out vanes on back side, dynamically balanced, ISO G6.3
- **Material:** .Cast iron ASTM A-48, class 30

CORD ENTRY: 40 ft. (12.1 m) Cord. Epoxy sealed housing with secondary pressure grommet for sealing and strain relief

MOTOR:

- **Design:** NEMA L- single phase, NEMA B - three phase torque curve, oil filled, squirrel cage induction
- **Winding:** Class F, class H rated magnet wire
- **Service Factor:** 1.15

SEAL:

- **Design:** Dual mechanical
- **Material:** Carbon/Ceramic/Buna-N Hardware - 300 series stainless

DIAPHRAGM: Buna-N

LIFTING BAIL: 304 Stainless steel

LIQUID TEMPERATURE: 104°F (40°C) Continuous

VOLUTE: Cast iron ASTM A-48, class 30

MOTOR HOUSING Cast iron ASTM A-48, class 30

SEAL PLATE: Cast iron ASTM A-48, class 30

SHAFT: 416 Stainless steel

SQUARE RINGS: Buna-N

HARDWARE: 300 Series stainless steel

PAINT: Air dry enamel (epoxy optional)

BEARINGS:

Upper Bearing:

- Design: Single row, ball, oil lubricated
- Load: Radial

Lower Bearing:

- Design: Single row, ball, oil lubricated
- Load: Radial


SINGLE PHASE: Capacitor start/capacitor run. Requires Barnes starter/panel which includes capacitors and overload protection

THREE PHASE: Tri Voltage motor 200-230/460. Requires overload protection to be included in control panel, VFD suitable

MOISTURE SENSOR: Normally open (N/O), requires relay in control panel

TEMPERATURE SENSOR: Normally Closed (N/C), Requires relay in control panel. For three phase units ONLY

Curves

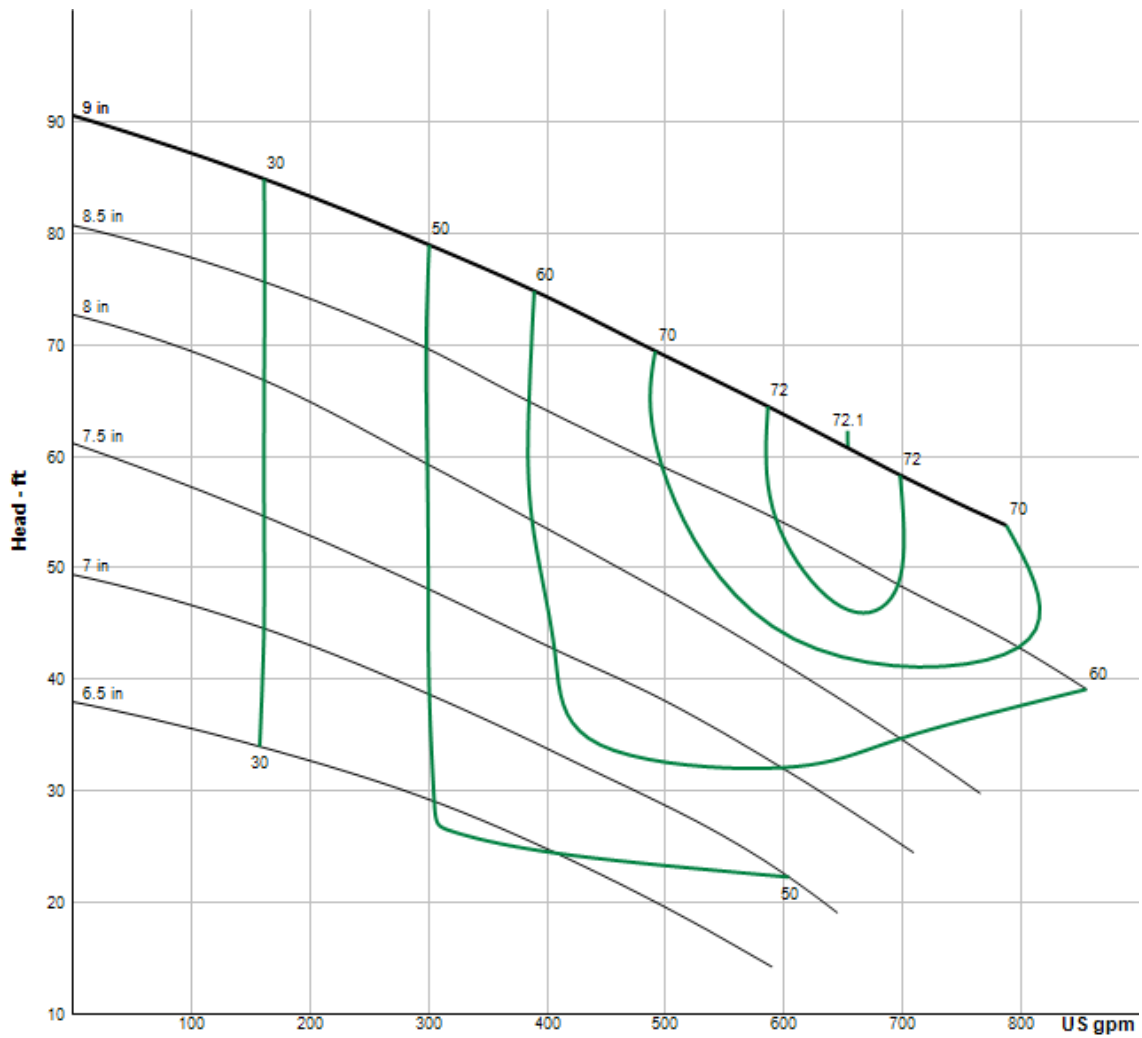

Pump HP	Impeller Dia mm (in.)
7.5	178 (7.00)
11.3	203 (8.00)
15.0	229 (9.00)

Model Information

MODEL NO.	4SE15034HL	4SE15044HL	4SE15054HL
PART NO.	084646	084647	089317
HP	15	15	15
VOLT/PH	230/3	460/3	575/3
Hz	60	60	60
RPM (nom)	1750	1750	1750
NEMA START CODE	D	D	D
FULL LOAD AMPS	38	19	15.2
LOCKED ROTOR AMPS	160	80	64
CORD SIZE	6/4	6/4	8/4
CORD TYPE	SOW	SOW	SOW
CORD O.D INCH (mm)	1.06 (27)	1.06 (27)	0.830 (21)

Drawing

