

# CSION® Alarm System

## Indoor Alarm System with 2 Alarm Inputs, Temperature Alarm, Auto Reset and Battery Backup

The CSION® indoor alarm system helps protect your home from potentially costly damage due to flooding, pump failure or freezing pipes. The sleek design of the enclosure, with its unique shape, smooth rounded edges, and large push button with LED light ring, makes this attractive alarm ideal for residential applications.


When the tank level rises, the high water float activates the alarm (audible and visual) to alert you of potentially threatening liquid level conditions. The CSION® alarm features an easy-to-see LED alarm light ring that illuminates red for alarm 1 and amber for alarm 2. The alarm horn can be silenced by pressing the large button, but the LED remains on as long as the alarm condition exists. Once the condition is cleared, the alarm automatically resets. A red "Low Temperature" LED activates when the temperature falls below 40°F (4°C) to help protect against freezing pipes; this can be disabled for installations in cold areas.

### FEATURES

- Compact NEMA 1 enclosure, designed for ease of installation, rated for indoor use
- Automatic alarm reset
- (2) sensor inputs to monitor (2) separate liquid level conditions
- LED alarm light ring alerts you of alarm status; red for alarm 1, amber for alarm 2
- Audible alarm activates with alarm 1, alarm 2, low temperature and low battery chirp
- LED low temperature indicator activates at 40°F (4°C) to alert of potential freezing conditions (green for temperature normal, red for low temperature), may be deactivated when not required
- LED power on indicator (green for primary power, amber for battery backup, red for low battery)
- Large alarm test/silence push button conveniently located on front of enclosure
- If primary power fails, the alarm system continues to work due to battery backup feature (batteries not included)
- Includes standard Control Duty Narrow Angle Low Current Mechanical control switch with 10 feet (3 meters) of cable (other lengths available) and mounting clamp
- Switching mechanism operates on low voltage and is isolated from the power line to reduce the possibility of shock
- Low battery chirp
- Includes auxiliary alarm contacts for easy attachment of remote devices
- Covered terminal block for easy, secure float switch installation



U.S. Patent No. D874,960

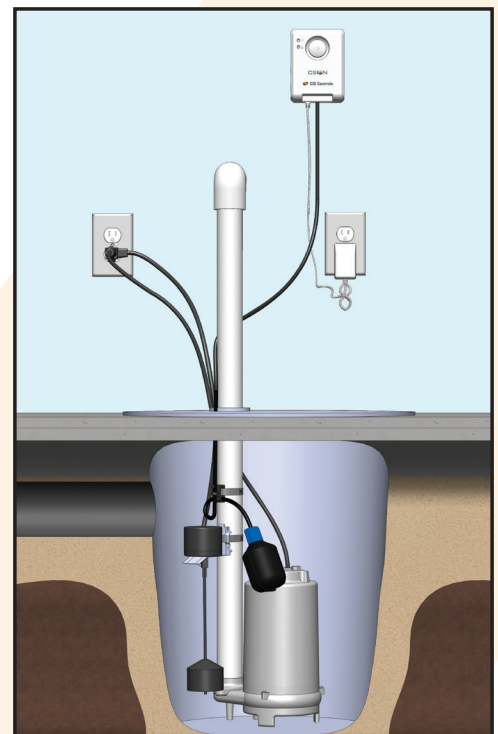

Toll Free: 888-342-5753  
customer.service@sjeinc.com  
www.csicontrols.com

## CSION® ALARM - 120 VAC

Part #	Description	Shipping Weight
1061879	CSION®, 120V, High with 10 ft. Control Duty Narrow Angle Low Current Mechanical Float	1.85 lbs.
1061878	CSION®, 120V, No Float	0.85 lbs.

**MASTER CARTON holds 16 boxed units.**  
**SEE PRICE BOOK FOR LIST PRICE.**

### SPECIFICATIONS

#### VOLTAGE:

Primary: 120 VAC, 60 Hz, 5 watts max. (alarm condition)

Secondary: 5 VDC

#### BATTERY BACKUP POWER: 4.5 VDC (3 AA batteries not included)

Operates for 24 hrs in alarm condition, one month when no alarm is present

#### ALARM ENCLOSURE: 5.5 x 4 x 1.75 inch (14 x 10 x 4.5 cm), NEMA 1 plastic.

#### ALARM HORN: 80 decibels at 10 feet (3 meters)

#### POWER CORD: 6 foot (1.8 meter) MicroUSB

#### FLOAT SWITCH CONNECTION TERMINALS:

For float switch connection only - do not apply power. (Voltage across terminals is 3 VDC).

#### FLOAT SWITCH:

**Control Duty Narrow Angle Low Current Mechanical** control switch with mounting clamp

**Cable:** 10 feet (3 meters), flexible 18 gauge, 2 conductor (UL) SJOW, water-resistant (CPE)

**Float:** 2.74 inch diameter x 4.83 inch long (7.0 cm x 12.3 cm), high impact, corrosion resistant polypropylene housing for use in sewage and water up to 140°F (60°C)

#### AUXILIARY ALARM CONTACTS:

Normally open, normally closed (CSA certified)

**Voltage:** ≤ 30 VAC/VDC (Class 2)

**Current:** 1 amp maximum

### OPTIONS

#### CONTROL SWITCH OPTIONS

The **CSION®** alarm system comes standard with a 10 ft **Control Duty Narrow Angle Mechanical** control switch with mounting clamp. Other float switches are available. See control switch section of the catalog.

To determine the price of alarm with an alternate float, add the price of the part number with "no float" to the price of the float switch.



Toll Free: 888-342-5753  
customer.service@sjeinc.com  
www.csicontrols.com

9500408E 01/23

© 2018 SJE, Inc. All Rights Reserved.  
CSI CONTROLS is a trademark of SJE, Inc.