

# Foot Valve

Sizes 1/2" / 15 mm


Model 60SE

**FLOMATIC®**

Flomatic Corporation

## Materials

Enviro Check®

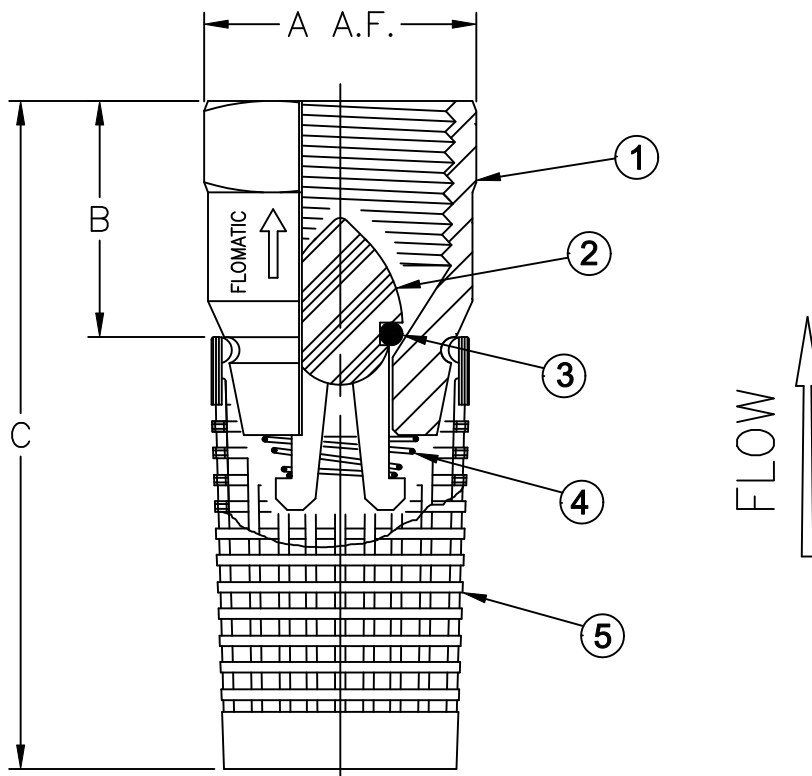

Open Area: 30-40%  
Max Temp 180°F (82°C)  
Max Pressure 150psi (10bar)

| Item # | Qty | Description | Material        | ASTM   |
|--------|-----|-------------|-----------------|--------|
| 1      | 1   | Body        | Unleaded Bronze | C89833 |
| 2      | 1   | Poppet      | Nylon 11        | -----  |
| 3      | 1   | O'Ring      | Buna-n          | -----  |
| 4      | 1   | Spring      | Stainless Steel | 302    |
| 5      | 1   | Strainer    | Polyethylene    | -----  |

## Dimensions

| Size |    | Part # | A    |    | B      |    | C      |    | Weight |     |
|------|----|--------|------|----|--------|----|--------|----|--------|-----|
| inch | mm |        | inch | mm | inch   | mm | inch   | mm | lbs    | kg  |
| 1/2  | 15 | 5820E  | 1    | 25 | 1-1/32 | 26 | 2-5/16 | 59 | 1/8    | .06 |

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.

**FLOMATIC® VALVES**

June 5, 1997  
Dwg No: S5820E Rev D (8/11)

FLOMATIC CORPORATION  
GLENS FALLS, N.Y. 12801  
PHONE (518) 761-9797  
FAX (518) 761-9798