

Foot Valve

Sizes 2" / 50 mm


Model 60SE



Flomatic Corporation

Materials

Enviro Check®

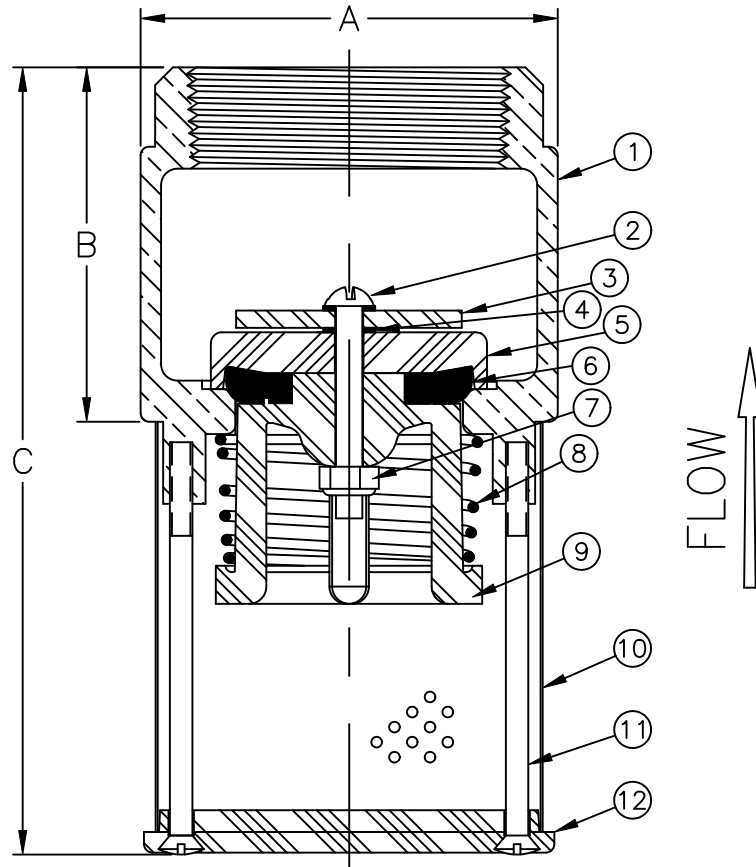

Open Area: 35-50%
Temp Max: 180°F (82°C)
Pressure Max: 250 psi (17 bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body	Unleaded Bronze	C89833	7	1	Nut	Nylon/SS	18-8
2	1	Bolt	Stainless Steel	18-8	8	1	Spring	Stainless Steel	303
3	1	Washer	Stainless Steel	18-8	9	1	Guide	Delrin	----
4	2	Washer	Nylon	-----	10	1	Screen	Stainless Steel	18-8
5	1	Dome	Noryl	GTX-830	11	2	Screw	Stainless Steel	18-8
6	1	Disc	Buna-n	----	12	1	Cap	Delrin	----

Dimensions

Size		Part #	A		B		C		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
2	50	4105E	3-3/64	77	2-19/32	66	5-3/4	146	2-7/64	.95

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



May 5, 2006
Dwg No: S4105E Rev: C (8/11)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798