
Performance Curve – S8LA/S8LAX RPM: 1750 DISCHARGE: 8" SOLIDS: 3"



The curves reflect maximum performance characteristics without exceeding full load (Nameplate) horsepower. All pumps have a service factor of 1.2. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F. and 1280 feet site elevation.

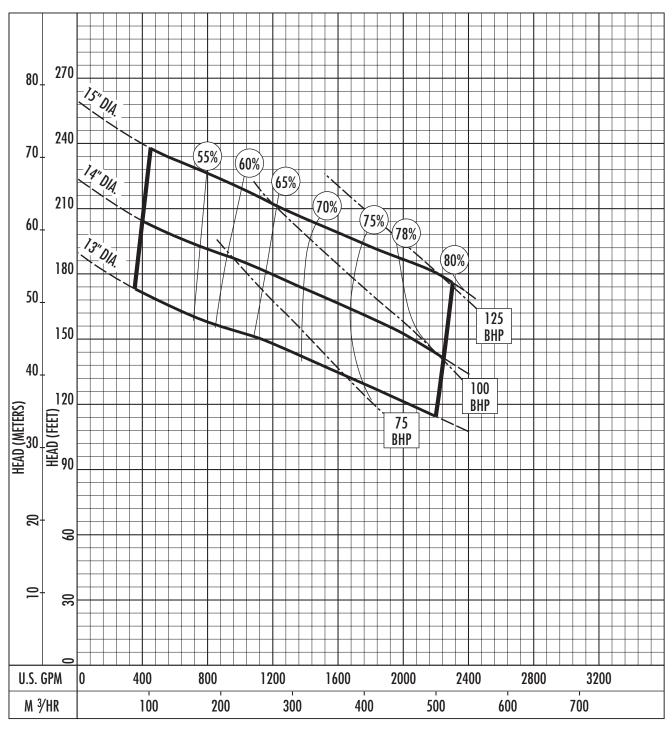

HYDROMATIC[°] GPM: _____ TDH: _____

Conditions of Service: