

SUMP PUMPS

A+

The A+ system converts 12V DC into 115V AC to run your Hydromatic B-A1 pump (included) during power outages


Typical Application	Emergency dewatering
Capacities	32 GPM (121.1 LPM)
Heads	up to 22 ft. (6.7 m)
Liquids Handling	Sump drain water
Water Temp.	140°F (60°C) intermittent
Housing	Thermoplastic



Superior Features

- Includes Hydromatic B-A1 or BV-A1 pump
- Automatically charges the battery. Runs the pump off of line power when available, avoiding unnecessary battery drain down
- Three indicator lights tell you the status of the system at all times
- Electronics are fan cooled for optimum efficiency and reliability
- Powder coated electronics enclosure for maximum durability and corrosion resistance
- Automatically checks for restored power in the AC line every five minutes
- Battery sold separately

Performance

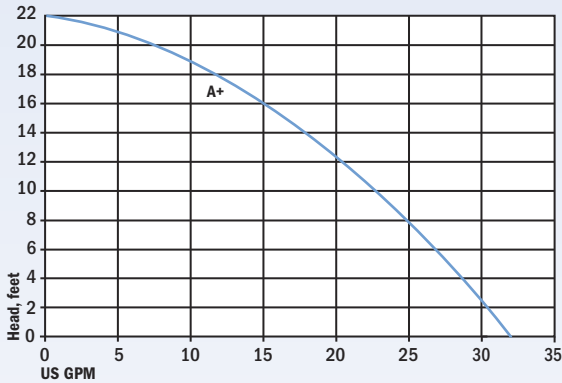

Duty Cycle Performance

