
Performance Curve – S3HRC/S3HVX RPM: 3450 DISCHARGE: 3" SOLIDS: 2"



The curves reflect maximum performance characteristics without exceeding full load (Nameplate) horsepower. All pumps have a service factor of 1.2. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F. and 1280 feet site elevation.

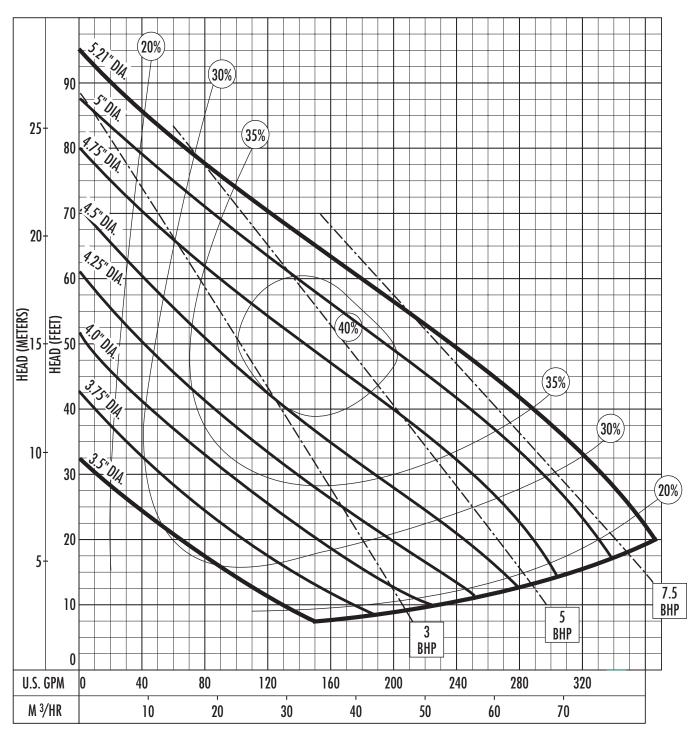

HYDROMATIC°

Conditions of Service: GPM: _____ TDH: _____