Little GIANT®

PE-1H-PW SERIES







Features


- Environmentally safe, oil-less
- Energy efficient
- 6' cord
- 7' maximum lift
- **36** watts
- 1/4" MNPT discharge
- Flow control accepts 3/8" or 1/2" ID Tubing
- Hooded intake for lower-level water pick-up
- For submersible use only

Construction

- Motor 1/125 HP epoxy encapsulated
- Intermittent Liquid Temp. up to 120°F
- Intake Screened
- Discharge 1/4" MNPT
- Housing Polyester
- Cover Polyester
- Volute Polypropylene
- Impeller Polypropylene
- Shaft Seal Nitrile®
- Screen Polypropylene


This pump features an epoxy-encapsulated motor, plastic housing and radial lip seal on the motor shaft. It provides enough power to effectively operate a water garden, statuary, or tabletop fountain. Algae build-up does not effect this small, powerful workhorse. In fact, it may even be used in some harsh, industrial-type applications. This "potted" pump is usually more compact in size than an oil-filled pump of equal flow capacity.

PE-1H-PW SERIES

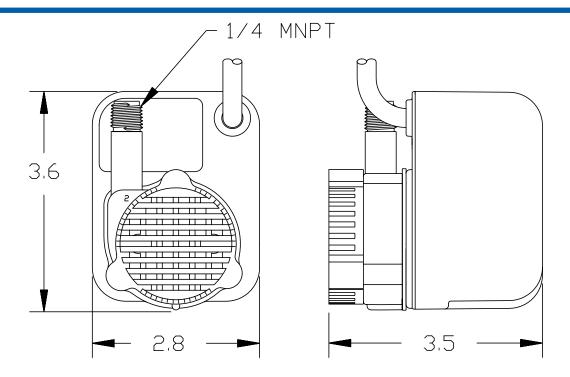

Specifications

Mo	del	Item Discharge						Performance (GPH@Head)					Shutoff		Cord	Weight		
N	0.	No.	Size	Listings	HP	Volts	Hertz	Amps	Watts	1'	2'	3'	4'	5'	Ft.	P.S.I.	Length (ft.)	(lbs.)
PE-1I	H-PW	566621	1/4" MNPT	UL/CSA	1/125	115	60	0.6	36	170	160	140	120	100	7	3.0	6	3.00

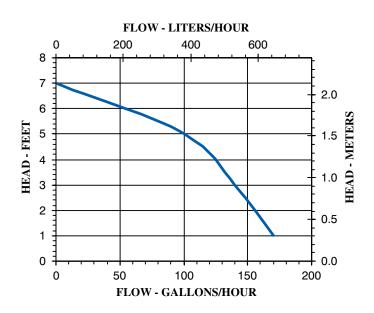

Replacement Parts

Volute	118340
Impeller	118441
Screen	118901
Gasket	101604
Flow Control	599045

PO Box 12010 • Oklahoma City, OK 73157 Phone: 800.701.7894 • Fax: 800.701.8046 E-mail: customerservice@littlegiant.com