

MYERS® MCU SERIES

The ideal solution for automatically removing liquid condensation from air conditioning and heating systems, refrigeration equipment and much more.

APPLICATIONS

Air conditioners, dehumidifiers, ice makers, high-efficiency furnaces, refrigeration systems, and water coolers



SPECIFICATIONS

Housing – ABS, high temperature, acid resistant thermoplastic

Check Valve Included

Shut Off Head – 20 ft. (MCU20S) and 15 ft. (MCU15/15S)

Discharge – 3/8" I.D. plastic tubing (not included)

Tank Capacity – 2 quarts

Motor/Electrical Data – Bearingless sealed motor, 115V, 1.45A, 1Ø, 60Hz

Capacity – Up to 200 gallons per hour

FEATURES

High Lift Capacity (MCU20S)

Powerful motor lifts liquid up to 20 feet

Easy Fit

4-3/4" low-profile design fits most applications

Built-in Safety Switch (MCU15S/MCU20S)

Shuts down furnace/air conditioner before tank overflows

Thermal Overload Protection

Durable, Corrosion Resistant

High-impact thermoplastic resists corrosion and 190°F intermittent liquid temperature

Extended Life

Sealed motor provides longer service life than similar condensate units


6 ft. Power Cord

ORDERING INFORMATION


Catalog Number	Volts	Phase/Cycles	Amps	Cord Length	Approx. Wt. Lbs.
MCU15	115	1/60	1.45	6'	3.25
MCU15S	115	1/60	1.45	6'	3.25
MCU20S	115	1/60	1.45	6'	3.25

MYERS® MCU SERIES

DIMENSIONS

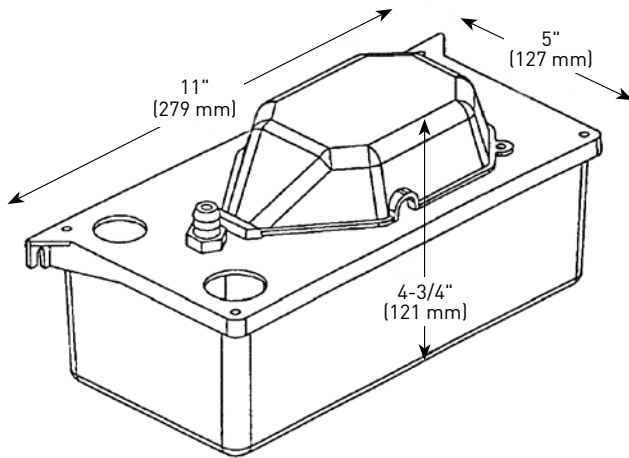

PUMP PERFORMANCE

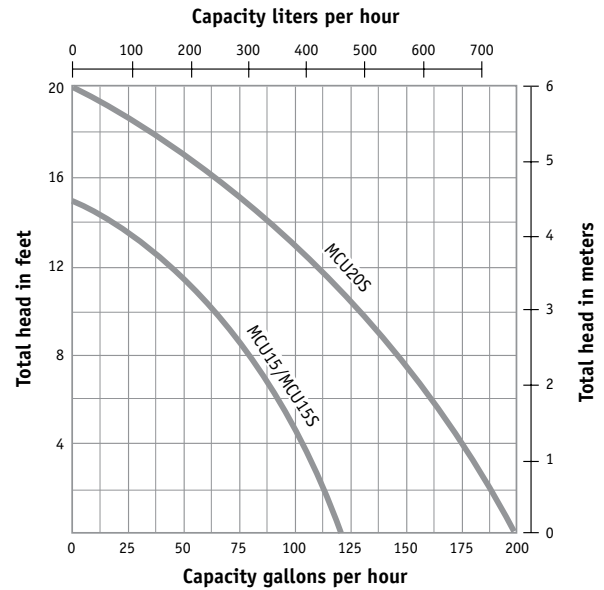

Catalog Number	Gallons per Hour at Discharge Head in Feet				
	0'	5'	10'	15'	20'
MCU15	120	90	65	0	–
MCU15S	120	90	65	0	–
MCU20S	200	170	130	80	0



USA
293 WRIGHT STREET, DELAVAN, WI 53115 WWW.FEMEYERS.COM
PH: 888-987-8677 ORDERS FAX: 800-426-9446

CANADA
269 TRILLIUM DRIVE, KITCHENER, ONTARIO, CANADA N2G 4W5
PH: 519-606-5484 ORDERS FAX: 800-426-9446

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.