


MS4S/MSB4S Series

Single-seal cast iron submersible sewage pumps for commercial wastewater applications

SPECIFICATIONS

Application	Light commercial
Capacities	Up to 590 GPM (37.2 LPS)
Heads	Up to 55 ft. (16.8 m)
Electrical	208-230V 1Ø; 208-230V/460-575V 3Ø
Motor	3 HP to 7-1/2 HP 1750 RPM
Intermittent Liquid Temp.	140°F (60°C)
Minimum Recommended Sump Diameter	Simplex = 30" (762.0 mm)
Operation	Control panel required
Materials of Construction	Class 30 cast iron
Impeller	Class 30 cast iron solids handling
Discharge Size	4" (101.6 mm) NPT vertical 4" (101.6 mm) flanged horizontal
Solids Handling	3.5" (88.9 mm)
Power Cord	35'; S00W cable 8-4/10-4/12-4

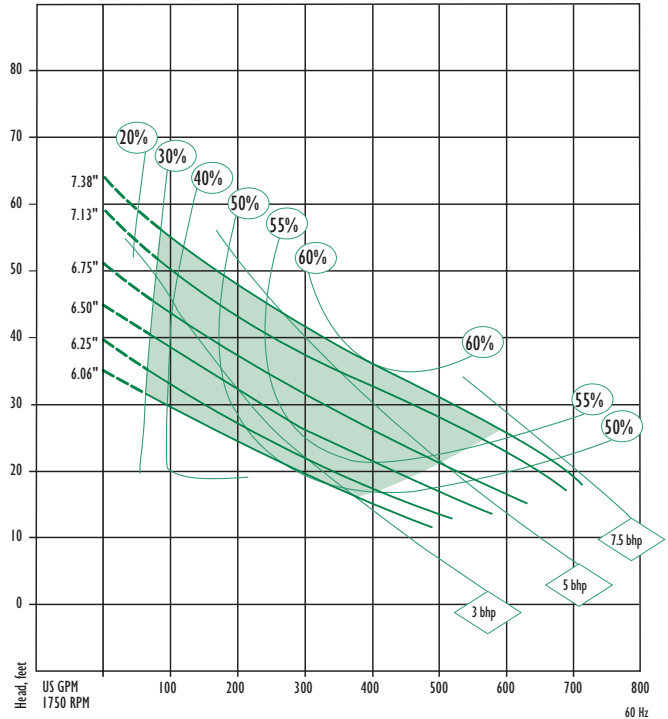

FEATURES

- Carbon/Ceramic type 21 mechanical seal
- Oil-filled motor
- Upper and lower single-row ball-bearing construction
- Submersible, two-vane, semi-open cast iron impeller

MS4S Shown

MSB4S Shown

