

# Float Arrangement Diagram




**Oreco Systems®**  
Incorporated

814 AIRWAY AVENUE  
SUTHERLIN, OREGON  
97479-9012

TELEPHONE:  
(541) 459-4449

FACSIMILE:  
(541) 459-2884

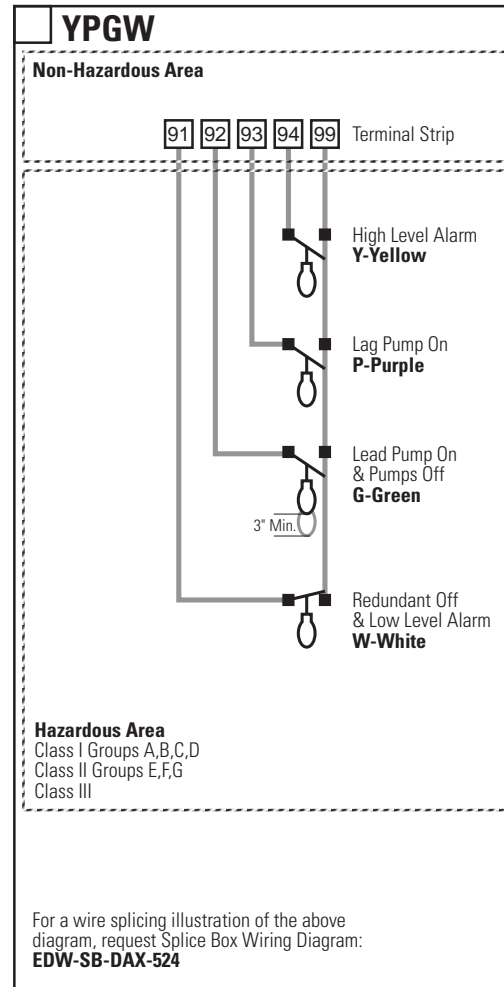

## Float Types

■ **Typical Oreco float model: A**  
**Specs:** contact - normally open  
 differential - no minimum  
 power rating - signal

■ **Typical Oreco float model: G**  
**Specs:** contact - normally open  
 differential - 3" min.  
 power rating - signal

■ **Typical Oreco float model: T**  
**Specs:** contact - normally closed  
 differential - no minimum  
 power rating - signal

Floats or equivalent devices must be purely resistive and non-energy storing

## Notes:

**Install in accordance with Art. 504 of the National Electric Code**

**Maximum cable length from panel to float is 2,000 ft.**

Control Panel Series

**DAX IR2 RO (YPGW)**

Drawing No.

**EDW-FA-DAX-514**

EDW-FA-DAX-514  
Rev 3.0 © 01/01/08