





Float Arrangement Diagram

Check the appropriate box for the float function (color code) used in your system.

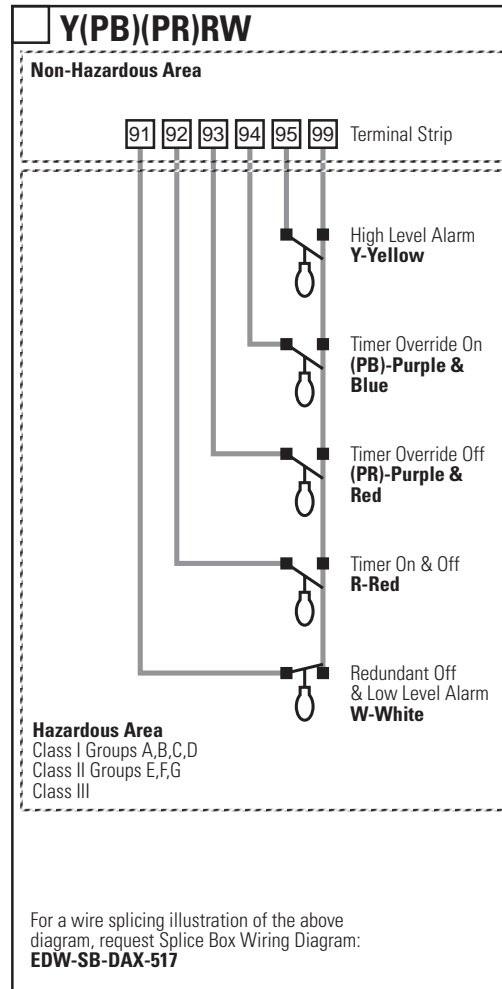

Float Types

- 
Typical Orenco float model: A
Specs: contact - normally open differential - no minimum
- 
Typical Orenco float model: G
Specs: contact - normally open differential - 3" min. power rating - signal
- 
Typical Orenco float model: T
Specs: contact - normally closed differential - no minimum power rating - signal

Floats or equivalent devices must be purely resistive and non-energy storing

Notes:

Install in accordance with Art. 504 of the National Electric Code

Maximum cable length from panel to float is 2,000 ft.



Orenco Systems®
 Incorporated

814 AIRWAY AVENUE
 SUTHERLIN, OREGON
 97479-9012

TELEPHONE:
 (541) 459-4449

FACSIMILE:
 (541) 459-2884

Control Panel Series

DAX IR3 PT RO

Drawing No.

EDW-FA-DAX-511

EDW-FA-DAX-511
 Rev 3.0 © 01/01/08