Splice Box Wiring Diagram

Cord Grip
Hand tighten each cord grip so that the cord will not easily slide through the grommet.

Pump Wires
From Control Panel

Pump Cord

Pump Cord

To Terminal #5

To Terminal #1

Y

High Level Alarm

W

To Terminal #6

Redundant Off & Low Level Alarm

P G

Timer Override On & Off

R

To Terminal #4

To Terminal #2

Timer On & Off
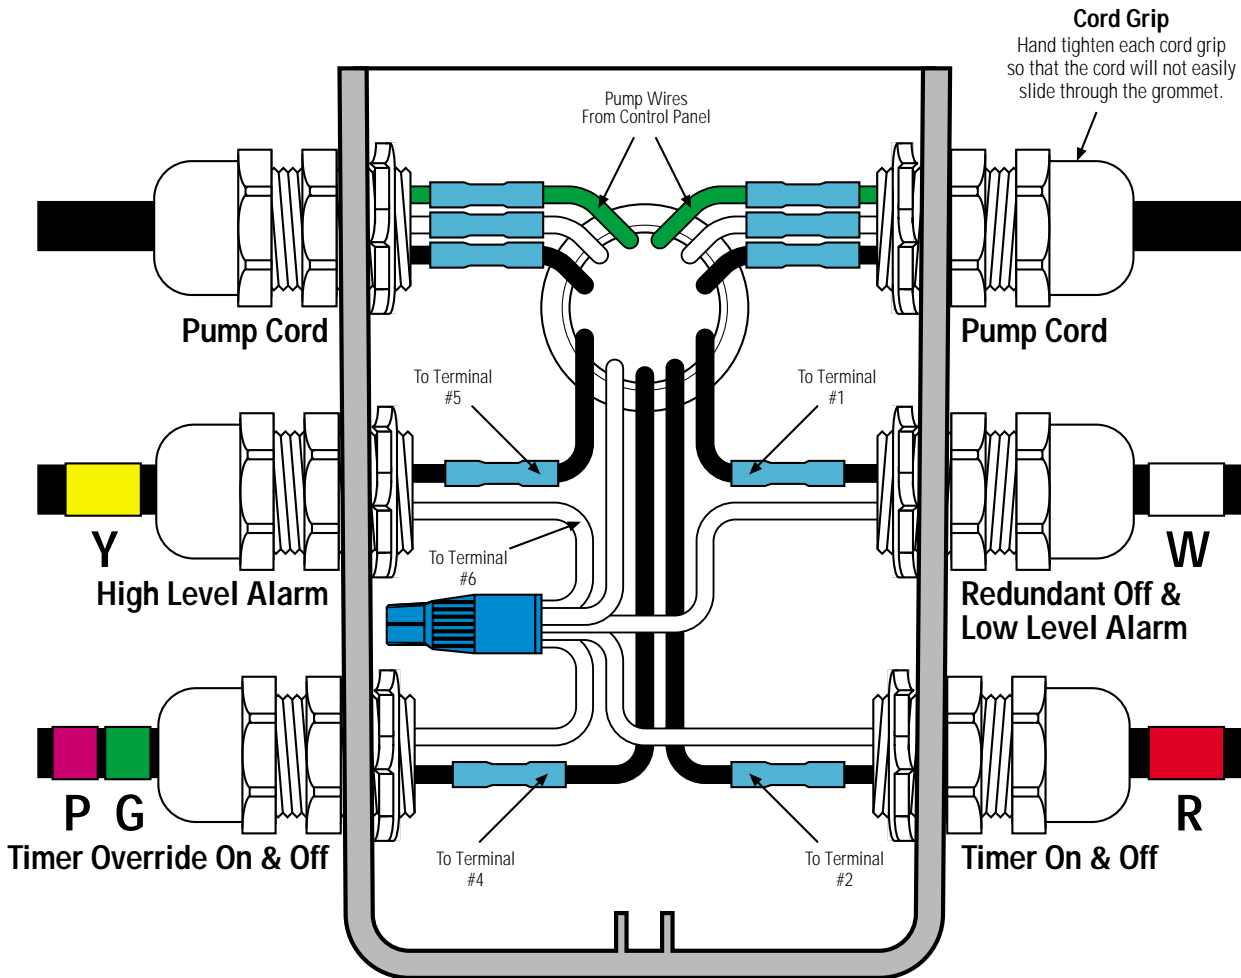
Key

▬	Black Wire
▭	White Wire
▬	Green Wire
▬	Waterproof Wire Nut
▬	Heat Shrink & Butt Connector *

* Refer to drawing EIN-SB-SB-1 for splicing instructions.

Float Tag Colors

Y - Yellow
P - Purple
B - Blue
G - Green
R - Red
O - Orange
E - Grey
W - White

Note: Multi-function floats will have more than one marker

Attention: Failure to follow splicing instructions will void warranty

Control Panel Series	Float Function Color Code	Splice Box Model	Drawing No.	
DAX PT RO	**Y(PG)RW**	**SB6**	**EDW-SB-DAX-45**	EDW-SB-DAX-45 Rev 1.2 ©04/29/98