



Float Arrangement Diagram



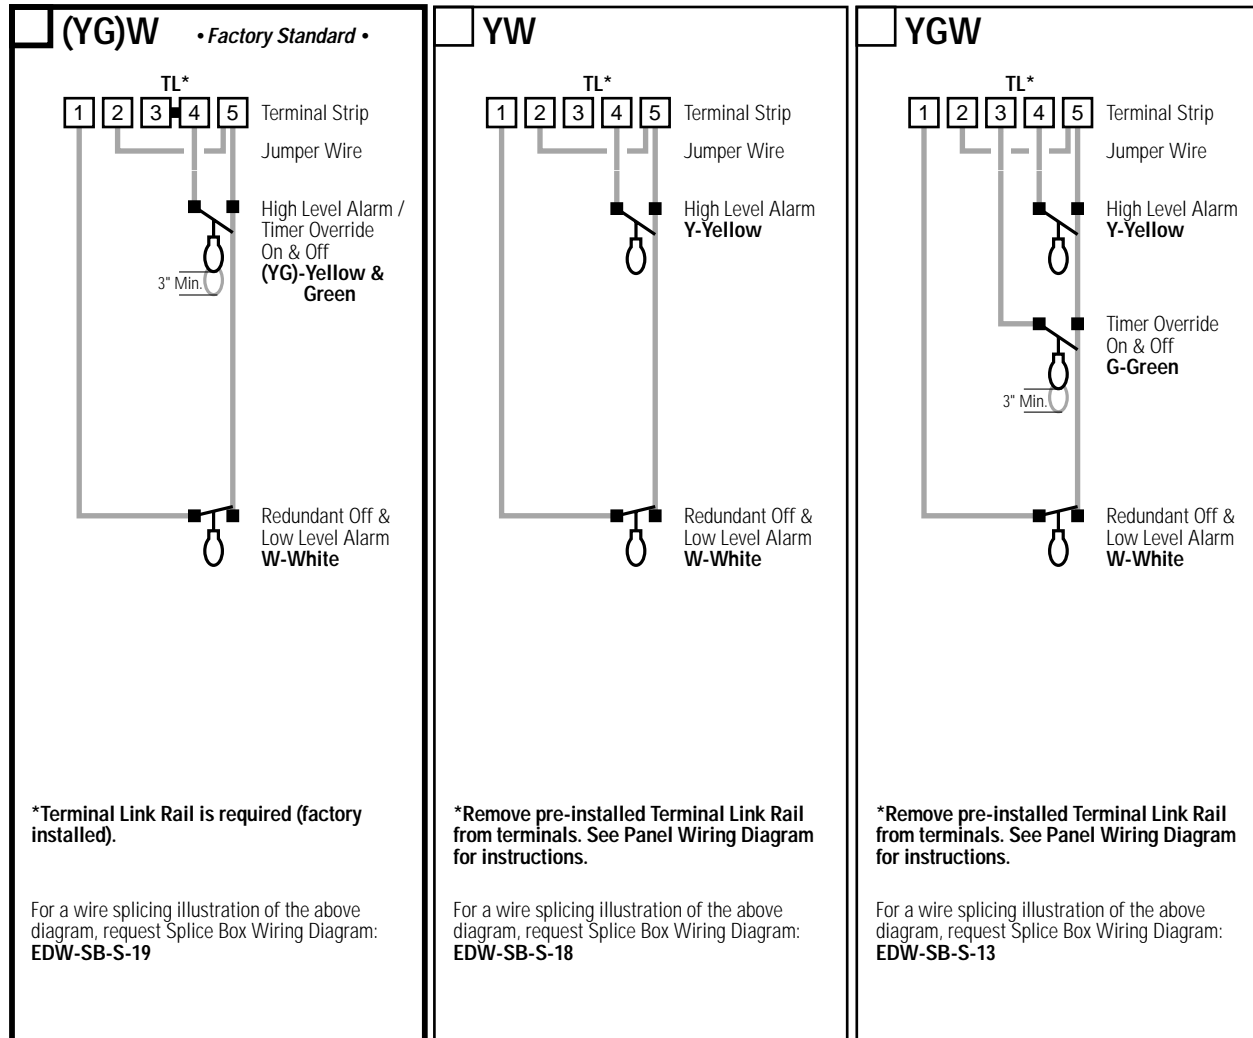

Oreco Systems®
Incorporated

Check the appropriate box for the float function (color code) used in your system.



- ### Float Types
- 

Typical OSI float model: A
Specs: contact - normally open differential - no minimum power rating - signal
Possible substitutions: B,C,D
 - 

Typical OSI float model: B
Specs: contact - normally open differential - 3" min. power rating - signal
Possible substitutions: C,D
 - 

Typical OSI float model: T
Specs: contact - normally closed differential - no minimum power rating - signal

814 AIRWAY AVENUE
SUTHERLIN, OREGON
97479-9012

TELEPHONE:
(541) 459-4449
FACSIMILE:
(541) 459-2884

Important: In recirculating systems, this drawing replaces drawing no. "EDW-FA-S-4".

Control Panel Series

Drawing No.

S PT RO

For use in recirculating systems.

EDW-FA-S-5

EDW-FA-S-5
Rev 2.1 ©12/18/98