Splice Box Wiring Diagram

Pump Wires From Control Panel

Cord Grip
Hand tighten each cord grip so that the cord will not easily slide through the grommet.

To Terminal #5

To Terminal #6

To Terminal #3

To Terminal #1

Y **P**
High Level Alarm / Lag Pump Enable

G
Override Timer On & Off

Pump Cord

W
Redundant Off & Low Level Alarm
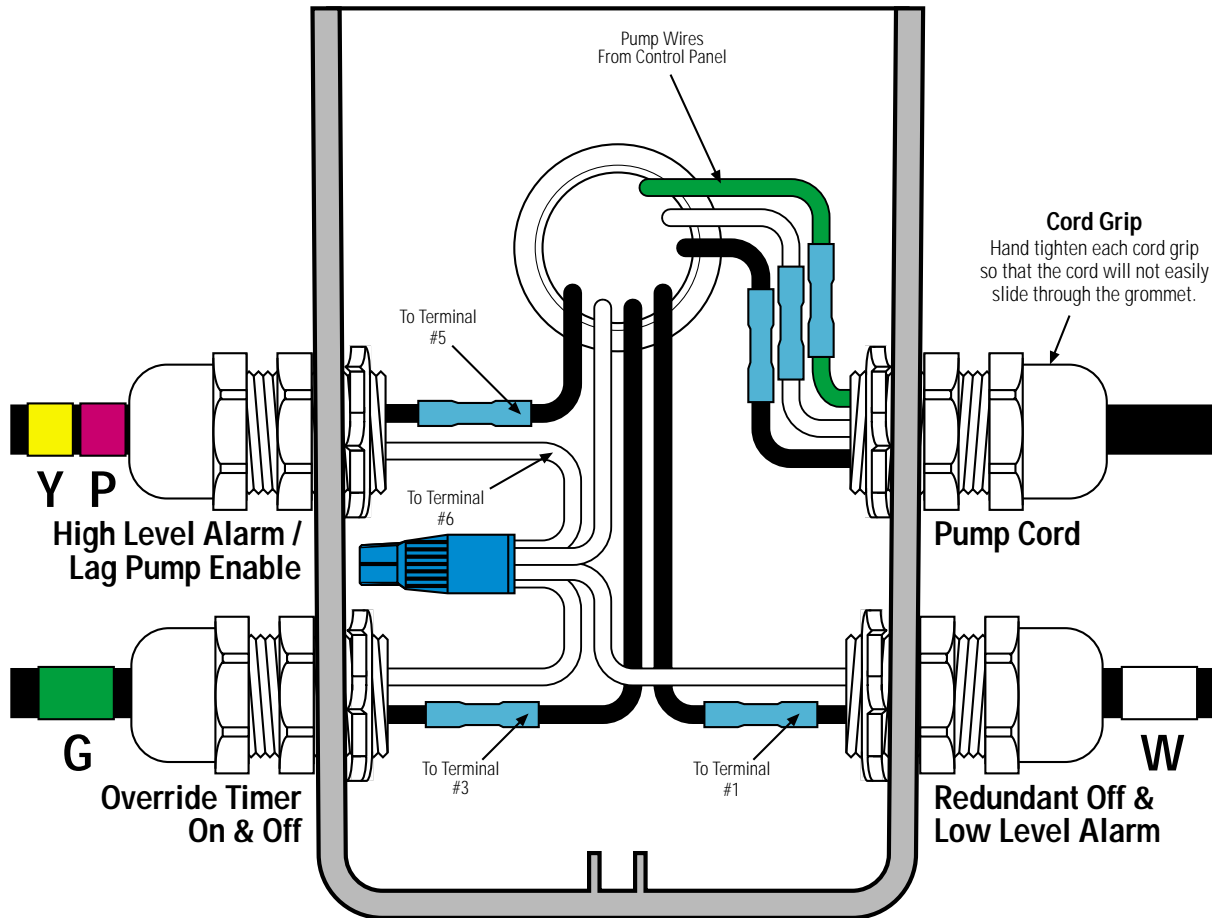
Key

▬	Black Wire
▭	White Wire
▬	Green Wire
▬	Waterproof Wire Nut
▬	Heat Shrink & Butt Connector *

* Refer to drawing EIN-SB-SB-1 for splicing instructions.

Float Tag Colors

Y - Yellow
P - Purple
B - Blue
G - Green
R - Red
O - Orange
E - Grey
W - White

Note: Multi-function floats will have more than one marker

Attention: Failure to follow splicing instructions will void warranty

Control Panel Series	Float Function Color Code	Splice Box Model	Drawing No.
MVP-DAX	**(YP)GW**	**SB4**	**EDW-SB-DAX-112**

EDW-SB-DAX-112
Rev 1.0 © 12/04/98