Splice Box Wiring Diagram

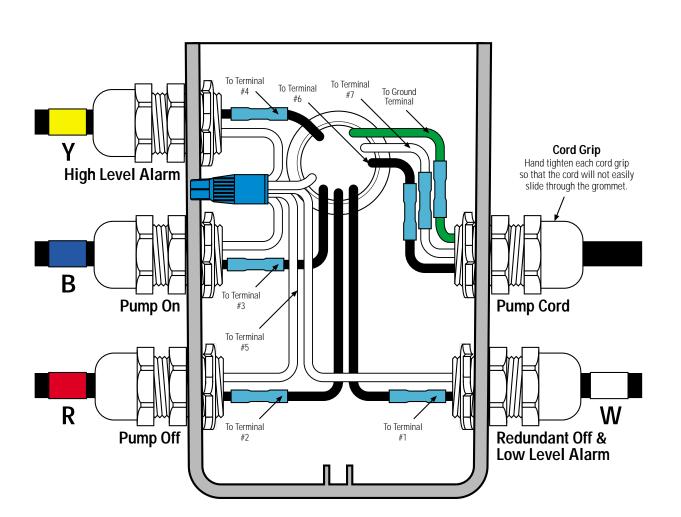To Terminal #4

To Terminal #6

To Terminal #7

To Ground Terminal

Y

High Level Alarm

B

Pump On

To Terminal #3

To Terminal #5

R

Pump Off

To Terminal #2

To Terminal #1

Cord Grip
Hand tighten each cord grip so that the cord will not easily slide through the grommet.

Pump Cord

W

Redundant Off & Low Level Alarm

Key

▬	Black Wire
▭	White Wire
▬	Green Wire
◼	Waterproof Wire Nut
◼	Heat Shrink & Butt Connector *

* Refer to drawing EIN-SB-SB-1 for splicing instructions.

Float Tag Colors

Y - Yellow
P - Purple
B - Blue
G - Green
R - Red
O - Orange
E - Grey
W - White

Note: Multi-function floats will have more than one marker

Attention: Failure to follow splicing instructions will void warranty

Control Panel Series	Float Function Color Code	Splice Box Model	Drawing No.	
S RO	**YBRW**	**SB5**	**EDW-SB-S-12**	EDW-SB-S-12 Rev 1.2 ©04/29/98