
Panel Wiring Diagram Model A1 ETM TS

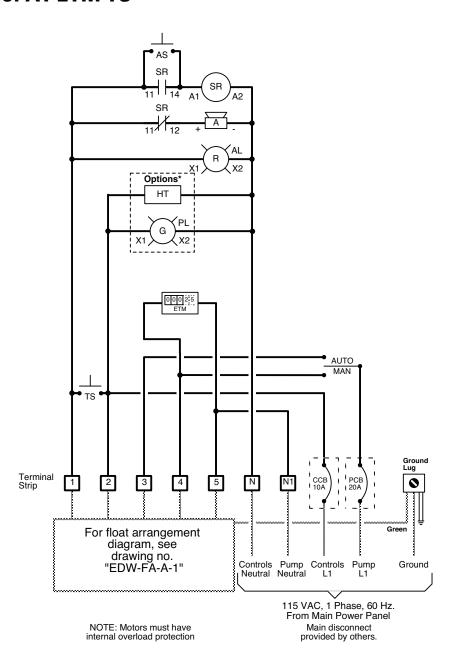

Simplex Operation

Remote Alarm Connections

Note: 115VAC signal is present during alarm conditions.

OSI Model AHW or equiv.

High Level Alarm: This float activates the alarm light and audible alarm when lifted. The audible alarm may be silenced by pressing the illuminated PUSH TO SILENCE button on the front of the control panel. The alarm light will remain on until the float is lowered.

Pump On & Off: This float turns on the pump when lifted and off when



Orenco Systems®

Incorporated

814 AIRWAY AVENUE

SUTHERLIN, OREGON

97479-9012 TELEPHONE:

(541) 459-4449

FACSIMILE:

(541) 459-2884

Kev

= Factory Wire = Field Wire

= Alternate Field Wire

A Audio Alarm, 115 VAC
AL Alarm Light
AS Audio Silence Switch
CCB = Controls Circuit Breaker

ETM = Elapsed Time Meter
PCB = Pump Circuit Breaker
SR = Silence Control Relay

= Alarm Test Switch

*Options

= Heater = Power Light

