


# MVP-Duplex Control Panel

## Applications

Orenco's MVP-Duplex control panel has a dual-mode feature, making it ideal for both timed- and demand-dosing in two-pump alternating systems. All MVPs include an easy-to-use, programmable logic unit that incorporates many timing and logic functions, such as multiple timing intervals to adjust for changing flow conditions and a built-in elapsed time meter and counter.



The programmable logic unit is the brain of the MVP-Duplex control panel

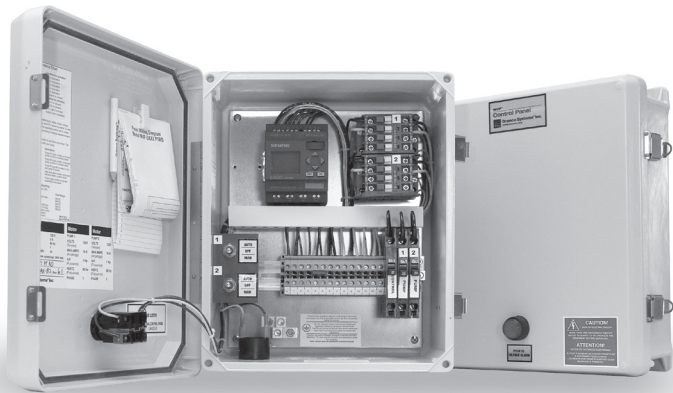

Orenco<sup>®</sup> MVP-DAX1DM control panel accommodates both timed- and demand-dosing applications



## Features/Unique Specifications


To specify this panel for your installation, require the following:


- Programmable for timed- or demand-dosing applications
- Built-in elapsed time meter and counters
- Digital timed-dose function accurate within 1%
- Multiple timer settings for optimum dosing during normal and peak flow conditions
- Pump alternation continues during override conditions
- Built-in programming keys for field-adjustable timer settings without a portable computer
- Ability to use EEPROM card to change panel functions
- High- and low-level alarm conditions differentiated by steady or blinking LED light
- Silenced alarms automatically reactivated after 12 hours if condition is not corrected
- Standard 120 VAC output for remote alarm activation
- Timed delays on float inputs to prevent chattering
- Ability to use one model of float for all functions
- Visual indicators of float positions
- Redundant-off function as standard
- UL 508 listing in US and Canada

## Standard Models

MVP-DAX1DM, MVP-DAX2DM

## Product Code Diagram

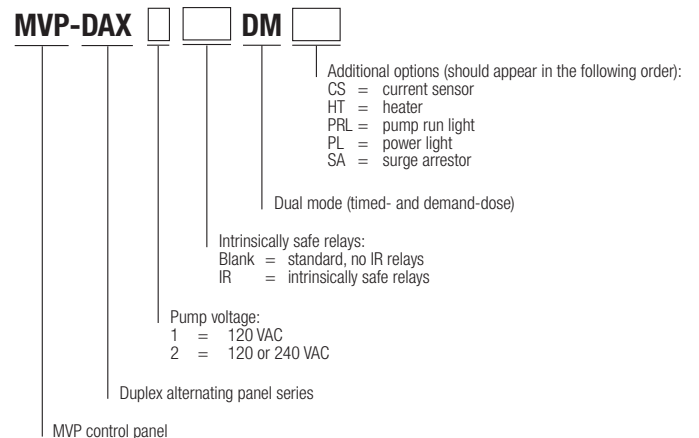

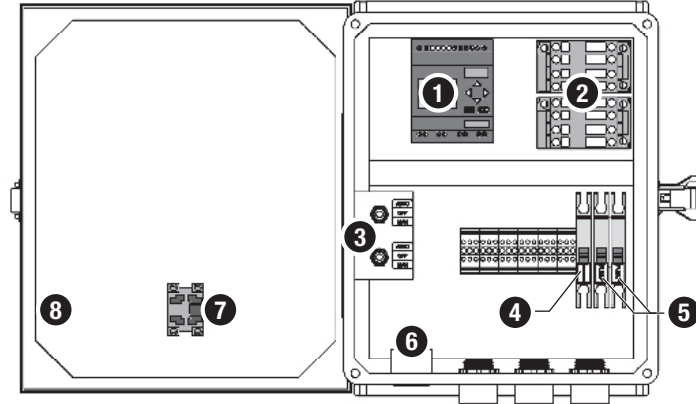

Orenco® MVP-DAX1DM 120 V panel

## Standard Components

Feature	Specification(s)
1. Programmable Logic Unit	120 VAC programmable logic unit with built-in LCD screen and programming keys. Provides control functions and timing for panel operation.
2. Motor-Start Contactors	120 VAC: 16 FLA, 1 hp (0.75 kW), 60 Hz; 2.5 million cycles at FLA (10 million at 50% of FLA) 240 VAC: 16 FLA, 3 hp (2.24 kW), 60 Hz; 2.5 million cycles at FLA (10 million at 50% of FLA)
3. Toggle Switches	Single-pole, double-throw HOA switch. 20 A, 1hp (0.75 kW).
4. Controls Circuit Breaker	10 A, OFF/ON switch. Single-pole 120 V*. DIN rail mounting with thermal magnetic tripping characteristics.
5. Pump Circuit Breakers	20 A, OFF/ON switches. Single-pole 120 V or double-pole 240 V. DIN rail mounting with thermal magnetic tripping characteristics.
6. Audible Alarm	95 dB at 24 in. (610 mm), warble-tone sound.
7. Visual Alarm	7/8-in. (22-mm) diameter red lens, "Push-to-silence." UL Type 4X rated, 1 W LED light, 120 VAC.
8. Panel Enclosure	Measures 11.5 in. high × 9.5 in. wide × 5.4 in. deep (290 × 240 × 135 mm). UL Type 4X rated. Constructed of UV-resistant fiberglass; hinges and latch are stainless steel. Conduit couplings provided.
Dual-Mode Operation	Programmable for timed- and demand-dosing.
MVP-DAX1DM Panel Ratings	120 VAC, 1 hp (0.75 kW), 16 A, single phase, 60 Hz.
MVP-DAX2DM Panel Ratings	240 VAC, 3 hp (2.24 kW), 16 A, single phase, 60 Hz.

## Optional Components

Feature	Specification(s)	Product Code Adder
Intrinsically Safe Control Relays	120 VAC. Listed per UL 698A, for Class 1 Div. 1, Groups A, B, C, D hazardous locations. Larger enclosure required.	IR
Current Sensor	120 VAC. Go/no-go operation. Pump fail indicator light on panel. Manual reset switch.	CS
Heater	Anti-condensation heater. Self-adjusting; radiates additional wattage as temperature drops.	HT
Pump Run Lights	7/8-in. (22-mm) diameter green lens. UL Type 4X rated, 1 W LED light, 120 VAC.	PRL
Power Light	7/8-in. (22-mm) diameter green lens. UL Type 4X rated, 1 W LED light, 120 VAC.	PL
Surge Arrestor	120 V. Status light on unit. Protects incoming power supply from electrical surges.	SA

\* 240 VAC units available for int'l markets

\*\* 120 VAC output for remote alarms comes standard.