
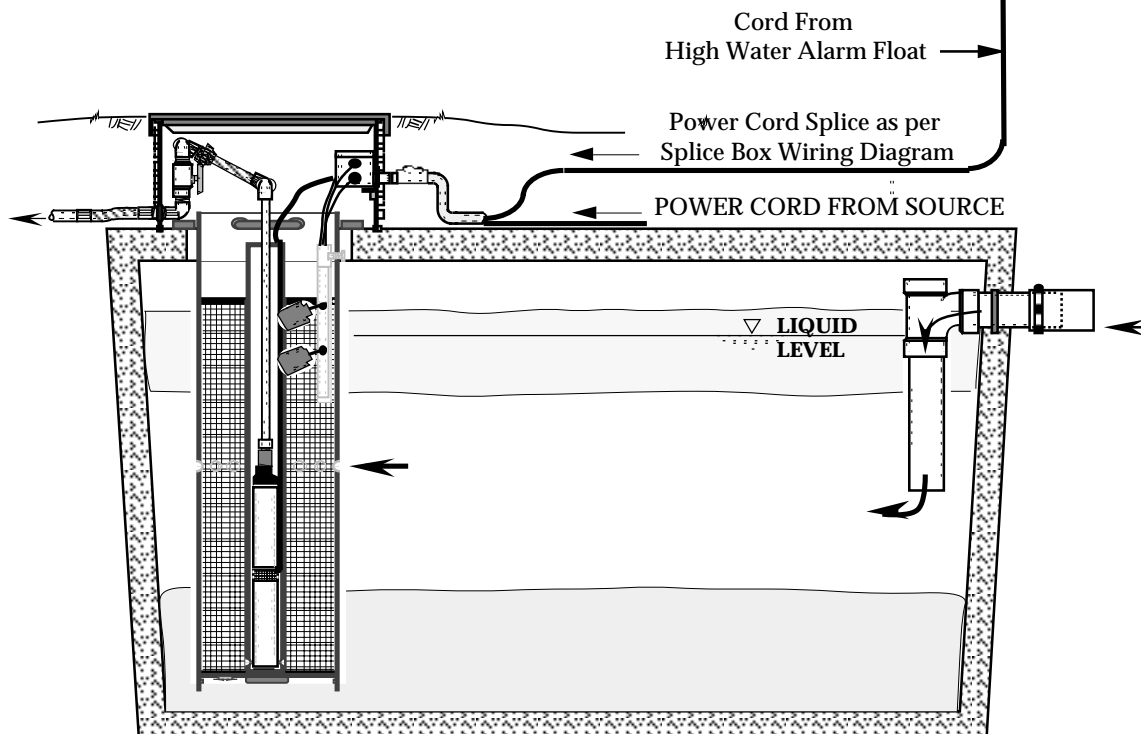


ORENCO SYSTEMS™ SENTINEL II LIQUID LEVEL ALARM

OSI's Sentinel II Liquid Level Alarm provides a reliable, low cost, audio and visual alarm with audio silence. Comes standard with a 9 VDC battery. Installation requires no special tools.

The Sentinel II was especially designed for use with a variety of on-site sewage treatment alternatives, such as sand filters, mounds and low pressure or standard drainfields. It may also be used to signal low water or high water conditions in water storage systems, and in ordinary septic tank drainfield applications that are subjected to backups caused by ground water infiltration or soils plugging.

The Sentinel II shall be installed indoors or in a NEMA 1 type environment where it is protected from the weather. The alarm is designed for use with mercury float switches but is compatible with any standard dry-contact switching method.

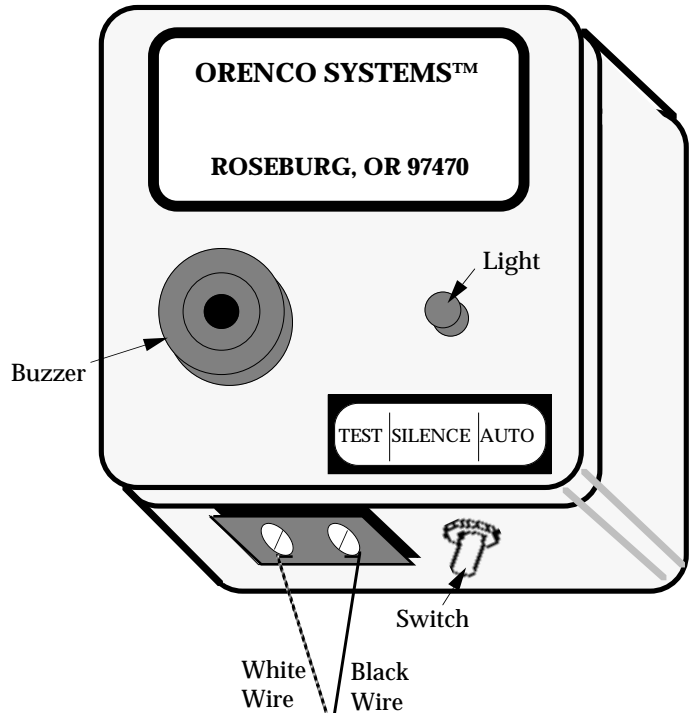

STEP (SEPTIC TANK EFFLUENT PUMP SYSTEM)
SIDE VIEW TYPICAL 1000 GALLON TANK