
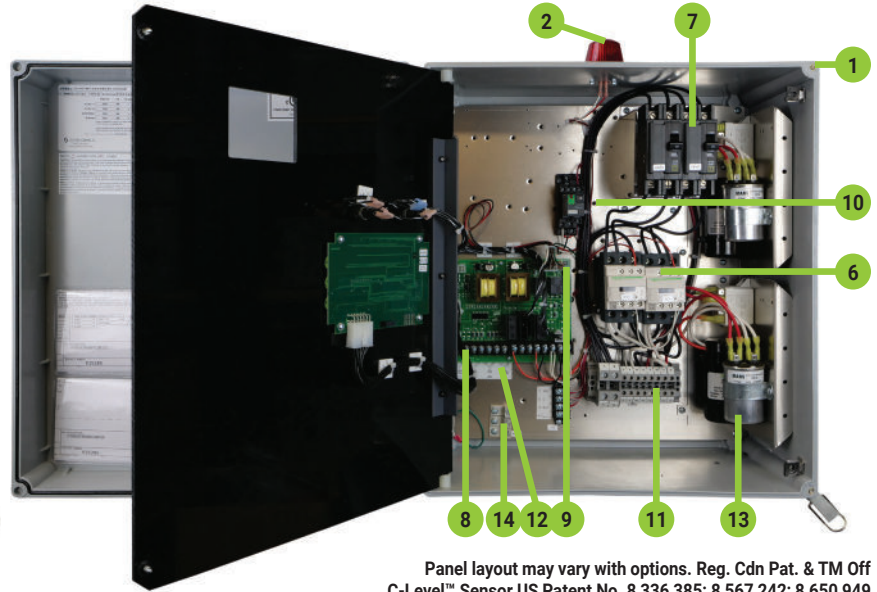


# INSTALLER FRIENDLY SERIES® (IFS) SINGLE PHASE DUPLEX CAPACITOR (START/RUN)

Demand Dose, Float or C-Level™ Sensor Controlled System for Pump Control and System Monitoring

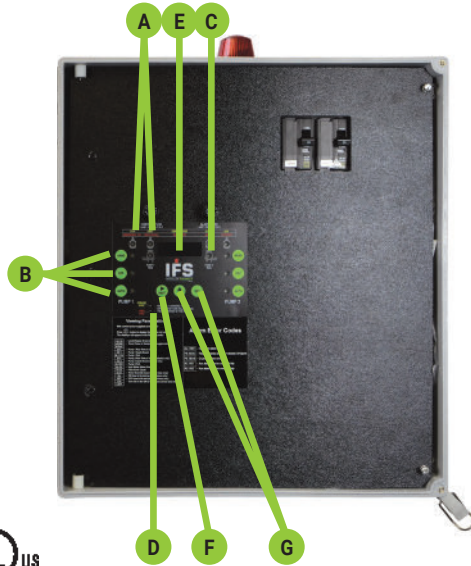

The IFS duplex capacitor (start/run) control panel utilizes an innovative circuit board design to control two alternating 120/208/240V single phase pumps in water and sewage applications. IFS panels feature an easy-to-use touch pad on inner door for programming and system monitoring. The alternating action equalizes pump wear. In addition, this system provides override control in the field either pump fail. The panel configuration can be easily converted in the field to either a timed dose or demand dose. Available with the EZconnex® float system.

The panel can utilize the C-Level™ sensor for continuous level monitoring. It senses the level in the tank and sends a signal to the panel. Pump activation levels can be adjusted by using the panel touch pad. C-Level™ CL40 sensor operating range is 3-39.9 inches (7.6-101.3 cm). C-Level™ CL100 operating range is 3-99.5 inches (7.6-252.7 cm).

- Five-year limited warranty on panel
- Two-year limited warranty on C-Level™ Sensor

**NOTE:** SJE Rhombus will warranty motor start kit components supplied by SJE Rhombus for one year. SJE Rhombus makes no warranty of any type with respect to motor start kits supplied by the customer.

## TOUCH PAD FEATURES

- Level Status indicators illuminate when floats or set points are activated; alarm will activate if a float operates out of sequence
- HOA (Hand-Off-Automatic) buttons control pump mode with indication; Hand mode defaults to Automatic when stop level or redundant off level is reached
- Pump Run indicators will illuminate when pumps are called to run
- Lead/Lag selector toggles pump operation (alternate 1-2 and 2-1)
- LED display for system information including: level in inches or centimeters (C-Level™ only), mode, pumps elapsed time (hh:mm), events (cycles), alarm counter, float error count, timed dose override counter (timed dose only), and ON/OFF times (timed dose only)
- NEXT push button toggles display
- UP and SET push buttons set pump ON/OFF times (timed dose only) and activation levels (C-Level™ only)

Panel layout may vary with options. Reg. Cdn Pat. & TM Off C-Level™ Sensor US Patent No. 8,336,385; 8,567,242; 8,650,949

## COMPONENTS

- Enclosure base measures 18 x 16 x 8 inches (45.72 x 40.64 x 20.32 cm); NEMA 4X fiberglass for outdoor or indoor use
- Red LED beacon provides 360° visual check of alarm condition
- Exterior Alarm Test/Normal/Silence switch allows horn and light to be tested and horn to be silenced in an alarm condition; alarm automatically resets once alarm condition is cleared (Not shown)
- Alarm horn provides audio warning of alarm condition (83 to 85 decibel rating) (Not shown)
- Overload relays (optional) provide pumps overload protection (Not shown)
- IEC motor contactors control pumps by switching electrical lines
- Circuit breakers (optional) provide pump disconnect and branch circuit protection
- Float and control/alarm incoming power terminal block
- Control Power indicator/fuse indicator light illuminates if control power is present in panel; alarm will activate if control fuse is blown
- Alarm Power indicator/fuse indicator light illuminates if alarm power is present in panel
- Large pump/incoming power terminal block
- Terminal block float and control/alarm incoming power wiring label
- Cap kits
- Ground lugs

**Note: Options, voltage, and amp range selected may change enclosure size and component layout.**

**Note:** Schematic/Wiring Diagram and Pump Specification Label are located inside the panel.



**INSTALLER FRIENDLY SERIES® SINGLE PHASE DUPLEX CAPACITOR (START/RUN) - Demand dose float controlled system for pump control and system monitoring.**

<b>IFS</b> CONTROL PANEL	<b>8</b> MODEL TYPE	<b>1</b> ALARM PACKAGE	<b>W</b> ENCLOSURE RATING	<b>1</b> STARTING DEVICE	<b>PUMP FULL LOAD AMPS</b>	<b>PUMP DISCONNECTS</b>	<b>FLOAT SWITCH APPLICATION</b>	<b>8AC</b> OPTIONS (LISTED BELOW)
-----------------------------	------------------------	---------------------------	------------------------------	-----------------------------	----------------------------	-------------------------	---------------------------------	--------------------------------------

<b>CONTROL PANEL</b>	✓	IFS	
<b>MODEL TYPE</b>	✓	8	Single Phase Duplex Capacitor (includes Option 8AC as standard)
<b>ALARM PACKAGE</b>	✓	1	Alarm Package (includes test/normal/silence switch, fuse, red light, & horn)
<b>ENCLOSURE RATING</b>	✓	W	Weatherproof, NEMA 4X (engineered thermoplastic)
<b>STARTING DEVICE</b>	✓	1	120/208/240V IEC Motor Contactor
<b>PUMP FULL LOAD AMPS</b>		0	0 - 7 FLA
		1	7 - 15 FLA
		2	15 - 20 FLA
		3	20 - 30 FLA
		4	30 - 40 FLA
<b>PUMP DISCONNECTS</b>		0	No Pump Disconnect
		4	Circuit Breaker
<b>FLOAT SWITCH APPLICATION</b>		H	Floats - Pump Down (select Option 17 below)
		L	Floats - Pump Up (select Option 17 below)
		E	EZconnex® Float Switch System (select Option 34 or 35 below)
		X	No Floats
		C	C-Level™ Sensor (select Option 24 or 29)* Select Option 3E and/or 4A & 4D for high water alarm and/or redundant off floats. Pump down applications only.

<b>PRICING WORKSHEET</b>	<b>IFS Single Phase Duplex Capacitor Base Price</b>	_____
	Alarm Package	_____
	Enclosure Rating	_____
	Starting Device	_____
	Pump Full Load Amps	_____
	Pump Disconnects	_____
	Float Switch Application	_____
	Total Options	_____
	Enclosure Upsize	_____
	<b>TOTAL LIST PRICE</b>	_____

**NOTE:** Pump down applications only. Industry practices suggest that a secondary device, such as a float switch, be used for redundant activation of the high level alarm and pump shut off when using the C-Level™ sensor.

**ENCLOSURE UPSIZE:**  
If you selected one or more of the ♦ options, add a one-time charge for enclosure upsize.

**Start/run capacitor kits must be ordered separately (see Option 12 below or call factory).**

OPTIONS	DESCRIPTION
3A	Alarm Flasher
3B	Manual Alarm Reset
3E	High Water Alarm Float (must also select Option 17) <b>Only Available with Float Switch Application = C</b>
4A ♦	Redundant Off (must also select Option 4D if floats are required)
4D	Redundant Off Float (must also select Option 4A and Option 17)
5A ♦	Thermal Cutout/Heat Sensor Auto Reset (for pumps with thermal switch leads)
5E ♦	Seal Failure Circuit and Red Indicator (2 Wire)
6A	Auxiliary Alarm Contact, Form C
✓ 8AC	<b>Display Board - Includes: ETM Counter, Events (Cycles) Counter, Alarm Counter and Lead/Lag Selector (included as standard)</b>
9_A	Pump Overload - Specify Amperage after Number 9 Followed by Letter "A" Example: 912A = 12 amp pump
	0 - 30 FLA
	30 - 40 FLA
10E	Lockable Latch - NEMA 4X
10F	Lightning Arrestor (must select pump circuit breakers, control and alarm power combined)
10K	Anti-condensation Heater
11C	Additional NEMA 1 Remote Alarm Panel (must also select Option 6A)
11D	Additional NEMA 4X Remote Alarm Panel (must also select Option 6A)
12B	Customer Supplied Motor Start Components, Mounted in Enclosure by SJE Rhombus
12C	Motor Start Components, Mounted and Supplied by SJE Rhombus

OPTIONS	DESCRIPTION
16A	10' Cord in Lieu of 20' Cord (per Float)
16B	15' Cord in Lieu of 20' Cord (per Float)
16C	30' Cord in Lieu of 20' Cord (per Float)
16D	40' Cord in Lieu of 20' Cord (per Float)
17C	Sensor Float® / Internally Weighted (per Float) - Mercury
17D	Sensor Float® / Externally Weighted (per Float) - Mercury
17G	SJE MilliAmpMaster™ / Pipe Clamp (per Float) - Mechanical
17H	SJE MilliAmpMaster™ / Externally Weighted (per Float) - Mechanical
17J	Sensor Float® / Pipe Clamp (per Float) - Mercury
19F	Fourth Float to Separate Alarm Function from Lag
24E	C-Level™ CL40 Sensor with 25' Vented Cable
24F	C-Level™ CL40 Sensor with 50' Vented Cable
24P	C-Level™ CL40 Sensor with 100' Vented Cable
24X	No C-Level™ CL40 Sensor
29A	C-Level™ CL100 Sensor with 25' Vented Cable
29B	C-Level™ CL100 Sensor with 50' Vented Cable
29C	C-Level™ CL100 Sensor with 100' Vented Cable
29X	No C-Level™ CL100 Sensor
34D ■	EZconnex® 4-Port, 25', with 10' Floats (3) / Pipe Clamp, Sealing Plug
34E ■	EZconnex® 4-Port, 50', with 10' Floats (3) / Pipe Clamp, Sealing Plug
34G ■	EZconnex® 4-Port, 25', with 20' Floats (3) / Pipe Clamp, Sealing Plug
34H ■	EZconnex® 4-Port, 50', with 20' Floats (3) / Pipe Clamp, Sealing Plug
35D ■	EZconnex® 4-Port, 25', with 10' Floats (4) / Pipe Clamp
35E ■	EZconnex® 4-Port, 50', with 10' Floats (4) / Pipe Clamp
35G ■	EZconnex® 4-Port, 25', with 20' Floats (4) / Pipe Clamp
35H ■	EZconnex® 4-Port, 50', with 20' Floats (4) / Pipe Clamp

\*C-Level™ Sensor lengths up to 300 ft. available. Call for details.

■ EZconnex® mechanically-activated, narrow angle float switches with quick release connections

California Prop 65 requires the following: ⚠️ **WARNING** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Installer Friendly Series®