

## HT3/HTX3 SERIES



S4005SES



### KEY FEATURES


- 1/3 HP
- Class 30 cast iron construction
- 1-1/2" (38mm) NPT discharge
- Carbon/Ceramic mechanical seal
- Piggy-back style float (HT3 only) for automatic or manual operation
- Oil-filled motor with automatic reset overload provides safe operation
- Ball bearing construction for long life
- Easily field serviceable

### SPECIFICATIONS

**Applications:** Boiler Blow-down Pits, Condensate Pits, Hot Water Sumps  
**Capacities:** 45 GPM (170 LPM)  
**Heads:** To 21 FT (6.4 M)  
**Cont. Liquid Temp:** HT = 194°F (90°C); HTX = 200°F (93°C)  
**Motor:** 1/3 HP (1550 RPM); Shaded pole with thermal overload  
**Electrical:** 115 Volt, 12.0FLA, 1Ph, 60Hz  
**Operation:** Tethered models or Manual models available  
**Min. Basin Diameter:** 18" (457mm)  
**Impeller:** Cast iron, non-clog, vortex type  
**Solids Handling:** 3/4" (19mm)  
**Power Cord:** 20' (6 M) 16-3, SJ00W-A/SJOW

### MODEL NUMBER

EC440120T  
 EC440120M  
 EC440220T

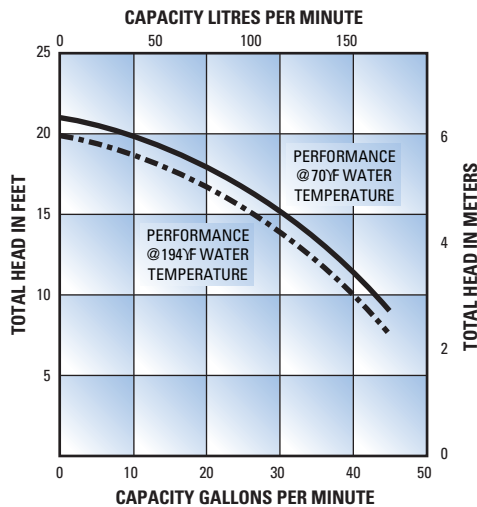

## EC4 SERIES



S4912SES



### KEY FEATURES

- 4/10 HP
- Class 30 cast iron construction
- 2" (50.8mm) NPT discharge
- Carbon/Ceramic mechanical seal
- Piggy-back style float for automatic or manual operation
- Oil-filled motor with automatic reset overload provides safe operation
- Ball bearing construction for long life
- Easily replaceable power cord with optional lengths available

### SPECIFICATIONS

**Applications:** Effluent and Wastewater Removal, Sump Drainage, Water Transfer, Flood Control  
**Capacities:** To 60 GPM (227 LPM)  
**Heads:** To 40 FT (12 M)  
**Cont. Liquid Temp:** 130°F (55°C)  
**Motor:** 4/10 HP (3450 RPM); PSC with thermal overload  
**Electrical:** 115 Volt, 10.0FLA, 1Ph, 60Hz  
**Operation:** Tethered models or Manual models available  
**Min. Basin Diameter:** 18" (457mm)  
**Impeller:** Thermoplastic, non-clog, vortex type  
**Solids Handling:** 3/4" (19mm)  
**Power Cord:** 20' (6 M) 16-3, SJTW-A/SJTW

### MODEL NUMBER

EC440120T  
 EC440120M

