

HT7 SERIES



KEY FEATURES


- 1/2 HP
- Class 30 cast iron construction
- 2" (50.8mm) NPT discharge
- Dual Silicon Carbide mechanical seals
- Oil-filled motor with automatic reset overload provides safe operation
- Ball bearing construction for long life
- 600V jacketed lead for added durability
- Easily replaceable power cord with optional lengths available

SPECIFICATIONS

Applications: High-capacity Sump, Effluent, Boiler Blow-down
Capacities: To 100 GPM (378 LPM)
Heads: To 50 FT (15.2 M)
Max. Liquid Temp: 200°F (93°C)
Motor: 1/2 HP (3450 RPM); PSC with thermal overload
Electrical: 115 Volt, 12.0FLA, 1Ph, 60Hz
Operation: Tethered model
Min. Basin Diameter: 18" (457mm)
Impeller: Cast iron, non-clog, vortex type
Solids Handling: 3/4" (19mm)
Power Cord: 20' (6 M) 16-4, SOOW-A/SOOW

MODEL NUMBER

HT750120T

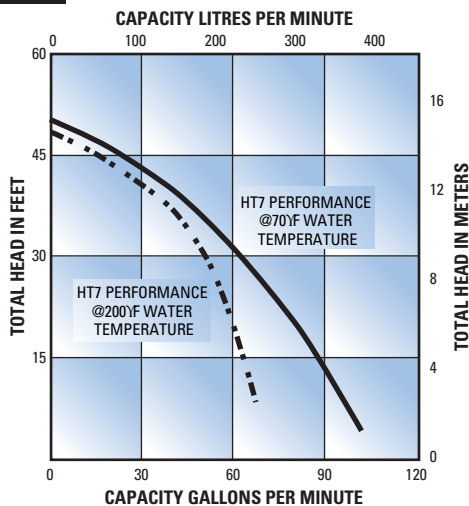

EC9 SERIES



KEY FEATURES

- 2 HP
- Class 30 cast iron construction
- 2" (50.8mm) NPT discharge
- Dual Silicon Carbide mechanical seals
- Standard controls available for automatic operation
- Oil-filled motor with automatic reset overload provides safe operation
- Ball bearing construction for long life
- Easily replaceable power cord with optional lengths available

SPECIFICATIONS

Applications: Sewage, High-capacity Sump, Effluent
Capacities: To 160 GPM (605 LPM)
Heads: To 85 FT (25.9 M)
Max. Liquid Temp: 130°F (55°C)
Motor: 2 HP (3450 RPM); PSC with thermal overload
Electrical: 230 Volt, 11.0FLA, 1Ph, 60Hz
Operation: Manual model
Min. Basin Diameter: 18" (457mm)
Impeller: Cast iron, non-clog, open vane type
Solids Handling: 3/4" (19mm)
Power Cord: Single Phase: 20'(6 M) 16-3, SJTW-A/SJTW

MODEL NUMBER

C9200220M

