

# MODEL LM44



Use the Floor Sucker®  
submerged or  
on any flat surface  
to pump clear water

## Floor Sucker® Utility Pump



# Model LM44 Floor Sucker® Utility Pump

Use the Floor Sucker® submerged or on any flat surface to pump clear water\*.

## Features


- 1-year warranty
- 1/4 HP, 115 V 1 Ph
- Performance up to 20' (6 m)
- Flows up to 1,800 GPH (30 GPM)
- Engineered plastic body
- Thermal overload protection
- Pumps down to 1/8"
- Fully submersible
- Automatic operation\*

\* Model LM44 is not to be used as a sump pump. Pump will turn on every 3 minutes for 5 seconds. If it senses water, it will continue to pump; if it does not sense water, it will turn off.

TOTAL DYNAMIC HEAD/FLOW  
PER MINUTE  
EFFLUENT AND DEWATERING

MODEL		44	
Feet	Meters	Gal.	Liters
5	1.5	30	114
10	3.0	22	83
15	4.6	12	45
Shut-off Head:		20 ft. (6.1 m)	

014065

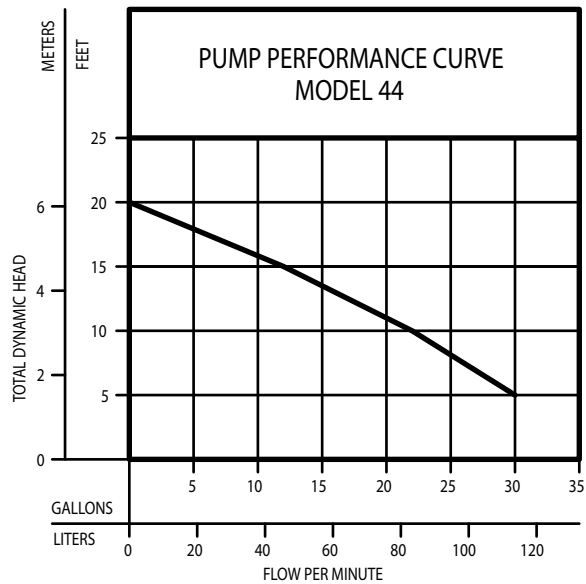

014065 B

## Product Specifications

Model	Seal	Mode	Volts	Ph	Amps	HP	Hz	Lbs	Kg	Max Width	Max Height
LM44	Single	Auto	115	1	2.5	1/4	60	9	4	6" (15 cm)	11-3/4" (30 cm)

FM3114  
0123  
Supersedes  
1019

**CAUTION** All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).