

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.



PUMP COMPANY


Zoeller Family of Water Solutions™

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:
www.zoeller.com

COMPARE THESE FEATURES

- 56 frame, NEMA J, capacitor start, double ball bearing motor for continuous operation.
- 3/4, 1, 1-1/2, and 2 HP sizes with single phase motor.
- Rugged cast iron pump casing. Multi stage for high head.
- Normal wearing parts are easily removed for service and replacement without disturbing the suction or discharge piping.
- One year limited warranty.

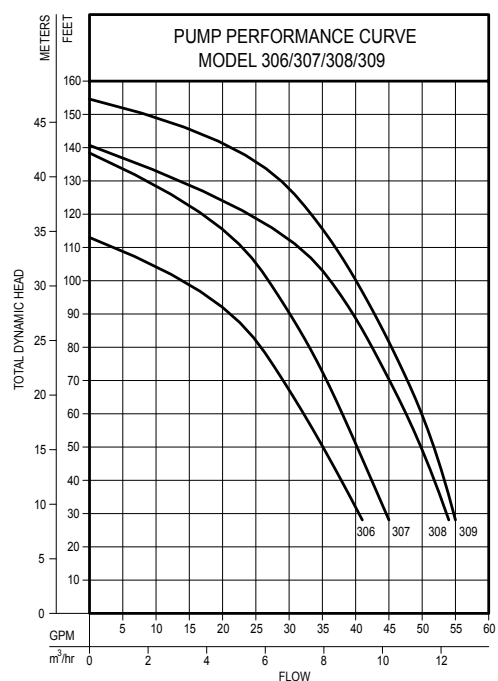

Two Stage Centrifugal Pumps



APPLICATIONS

- Booster service
- Water circulation
- Cooling systems
- Laundry equipment
- Liquid transfers

NE306 - 3/4 HP
NE307 - 1 HP
NE308 - 1-1/2 HP
NE309 - 2 HP

MODEL NO.	HP	STAGES	SUCTION LIFT FT.	CAPACITY U.S. GPM										MAX. PRESS. PSI	MAX. CASE PRESS.	MAX. LIQUID TEMP.
1 PHASE				DISCHARGE PRESSURE PSI												
				10	20	30	40	50	60	70	80	90				
NE306 306-0006	3/4	2	5	41	35	28	20						49	160psig	160° F	
			15	38	32	26	13									
			25	32	29	22										
NE307 307-0006	1	2	5	45	40	35	28	20					60	160psig	160° F	
			15	42	39	33	26	15								
			25	35	33	30	22									
NE308 308-0006	1 1/2	2	5	54	50	44	38	28					61	160psig	160° F	
			15	48	46	42	35	23								
			25	37	35	33	28	17								
NE309 309-0006	2	2	5	55	52	47	41	34	23				67	160psig	160° F	
			15	49	47	45	39	30	17							
			25	37	36	33	32	26								

▲Do not exceed the maximum case pressure and maximum liquid temperature rating of the pump
Suction and Discharge Tappings 1-1/2" X 1-1/4"