

Performance Data

SKHD150



Wholesale Products Page: 6250-1

Section: Performance Data

Dated: January 2001

RPM: **3450**

Discharge: **1-1/2"** Solids: **3/4"**

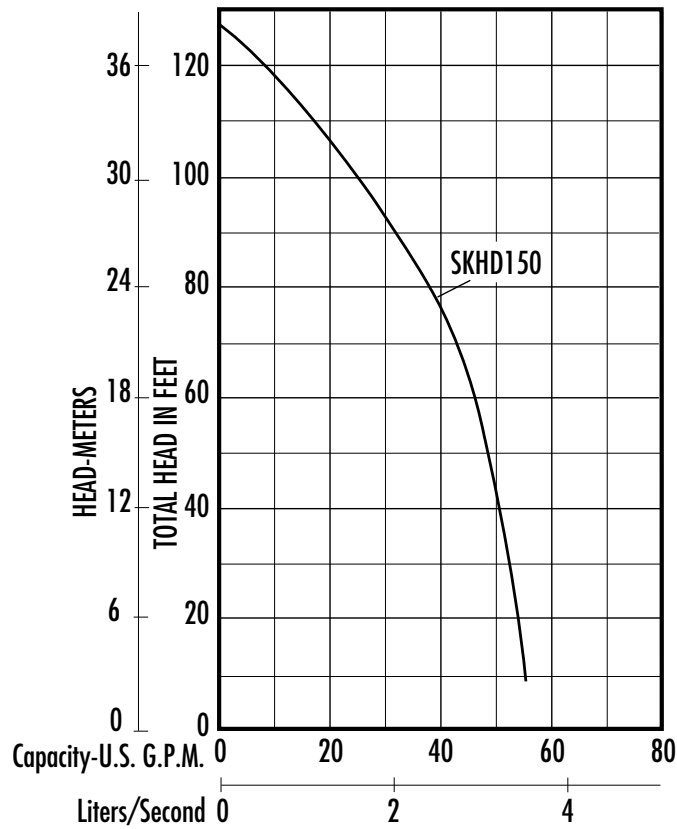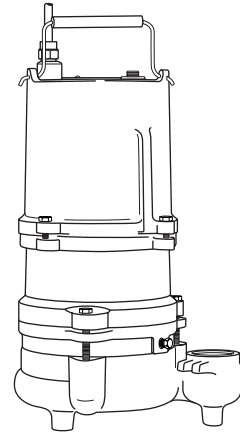


The curves reflect maximum performance characteristics without exceeding full load (Nameplate) horsepower. All pumps have a service factor of 1.2. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F. and 1280 feet site elevation.

Conditions of Service:

GPM: _____ TDH: _____



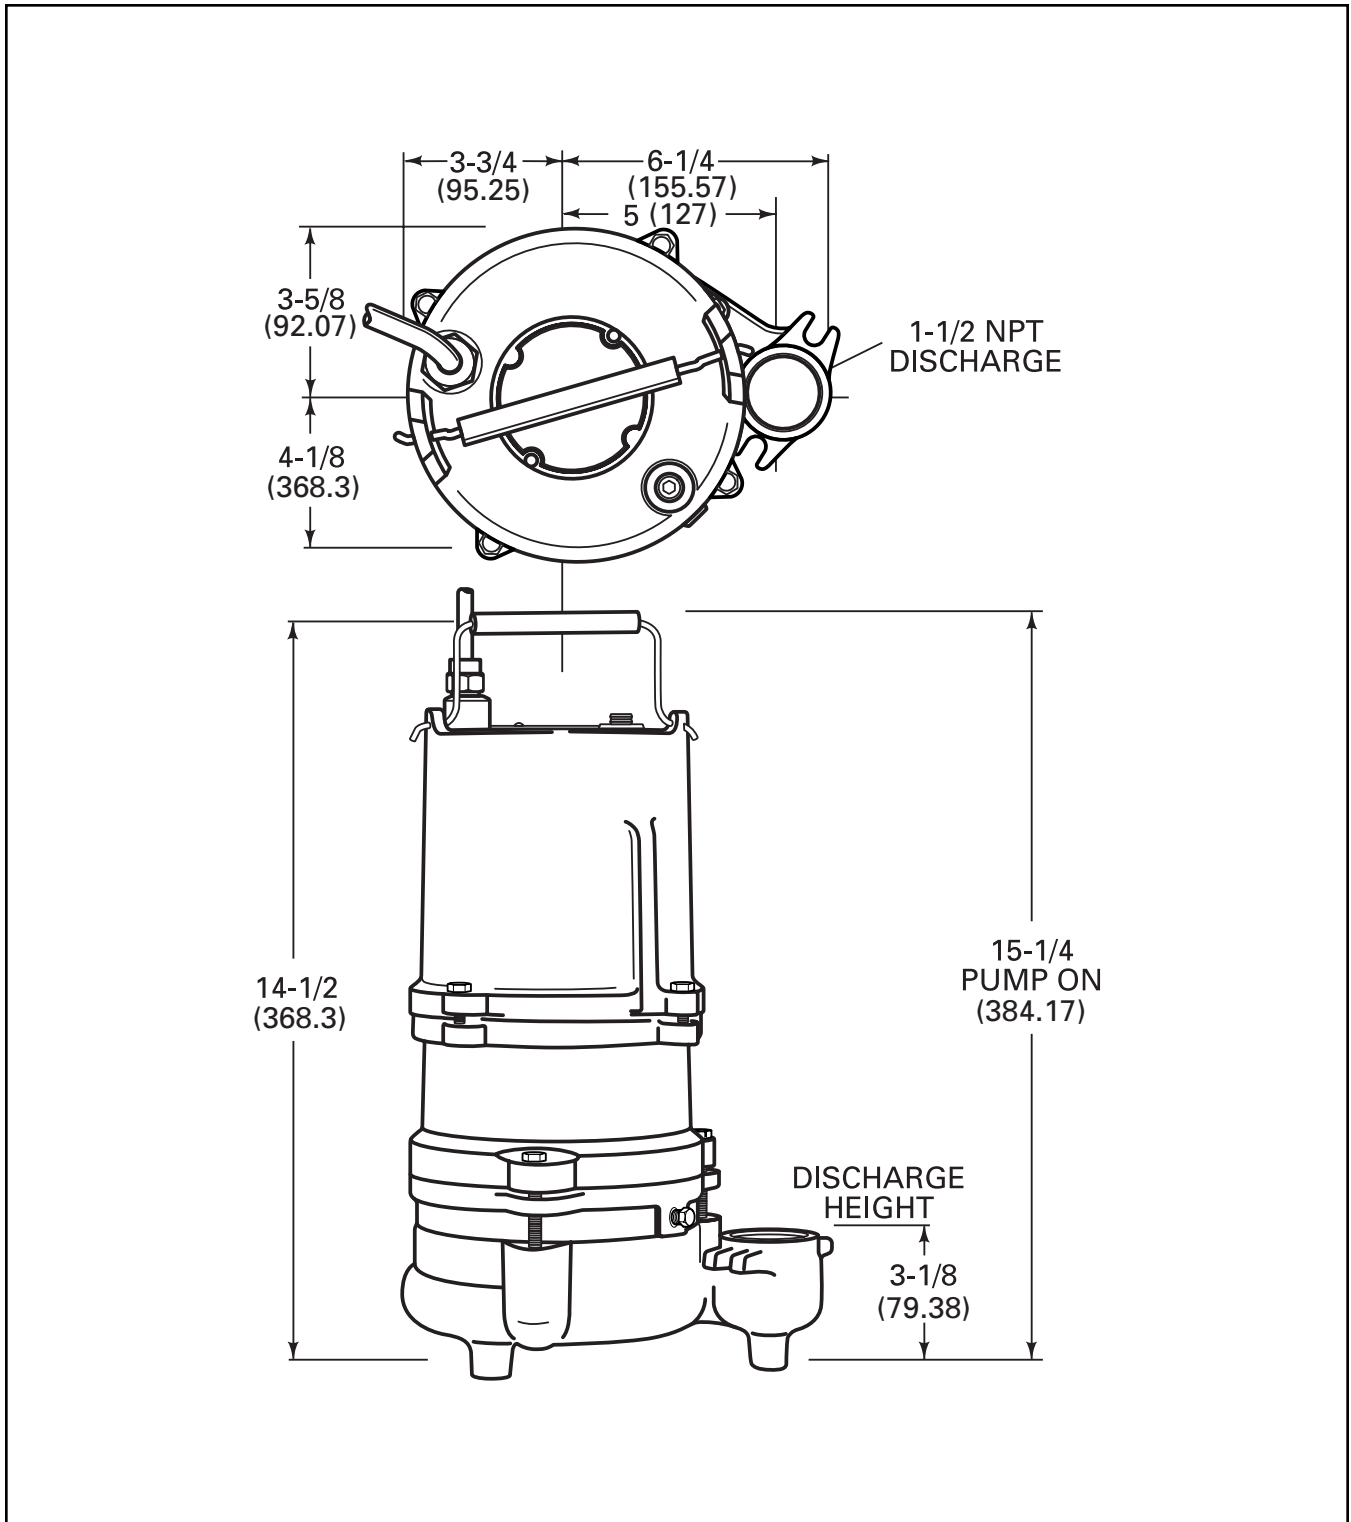


All dimensions in inches. Metric for international use. Component dimensions may vary $\pm 1/8$ inch. Dimensional data not for construction purpose unless certified. Dimensions and weights are approximate. On/Off level adjustable. We reserve the right to make revisions to our product (s) and the product (s) specifications without notice.

MODEL: SKHD150, Effluent Pump

R.P.M.	3450
MOTOR TYPE	OIL FILLED, THERMAL OVERLOAD WITH AUTOMATIC RESET
MOTOR PROTECTION	THERMAL OVERLOAD WITH AUTOMATIC RESET

HP	VOLTAGE	PHASE	NEC CODE	SERVICE FACTOR	FULL LOAD AMPS
1.5	230	1	-	1	12
1.5	200	3	-	1	6.1
1.5	230	3	-	1	5.0
1.5	460	3	-	1	2.5
1.5	575	3	-	1	2.0

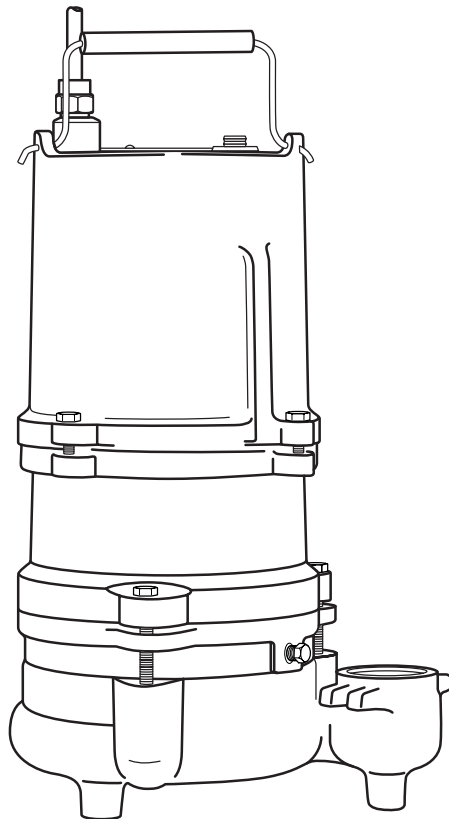

MODEL: SKHD150, Effluent Pump**Physical Data:**

DISCHARGE SIZE	1-1/2" NPT
SOLIDS SIZE	3/4"
IMPELLER TYPE	SEMI OPEN NON CLOG
CABLE LENGTH	20' STANDARD
PAINT	PAINTED AFTER ASSEMBLY, DARK GREEN, WATER REDUCIBLE ENAMEL, ONE COAT, AIR DRIED.

Temperature:

MAXIMUM LIQUID	140°F
MAXIMUM STATOR	
OIL FLASH POINT	

Technical Data:

POWER CORD TYPE	STW-A	
MATERIALS OF CONSTRUCTION	MOTOR HOUSING	CAST IRON
	CASING	CAST IRON
	IMPELLER	THERMOPLASTIC
	MOTOR SHAFT	
	HARDWARE	STAINLESS STEEL
	"O" RINGS	BUNA - N
MECHANICAL SEALS Standard:	CARBON / CERAMIC	
UPPER BEARING	BALL	
LOWER BEARING	BALL	

SUBMERSIBLE HIGH HEAD, DOUBLE SEAL MODEL: SKHD150

1.01 GENERAL

Contractor shall furnish all labor, materials, equipment and incidentals required to provide _____ (Qty.) submersible centrifugal high head double seal effluent pump(s) as specified herein. The pump model covered in this specification is the SKHD150. The pump furnished for this application shall be MODEL _____ as manufactured by Hydromatic Pumps.

2.02 DESIGN CONDITIONS

Each pump shall be rated _____ H.P., _____ volts, _____ phase, _____ hertz and operate at _____ RPM.

3.01 OPERATING CONDITIONS

The pump shall deliver _____ U.S. GPM/LPS at _____ feet/meters TDH, and handle a _____ inch solid. The curve submitted for approval shall state, in addition to head and capacity performance, solid handling capability, amp rating, and design impeller diameter.

4.01 CONSTRUCTION

Each pump shall be of the sealed submersible type, incorporating features normally found in pumps furnished for the residential market.

These features include:

1. The pump volute, motor, and seal housing shall be high quality gray cast iron, ASTM A-48, Class 30.
2. The pump inlet shall be open and clear, without screening to provide access for effluent and septic tank solids.
3. All external mating parts shall be machined and Buna N, O-Ring sealed.
4. All fasteners exposed to the pumped liquid shall be 300 series stainless steel.
5. All power cords shall be water resistant UL or CSA approved, with double insulation, and sized as a function of Amp. draw.

5.01 MOTOR AND SHAFT

The stator, rotor and bearings shall be mounted in a sealed submersible type housing. Single phase motors shall be split phase with solid state switch and start capacitor. Three phase motors shall be Polyphase. Full Load and Locked Rotor Amps as well as Start and Run winding resistance shall be tabulated for each pump.

6.01 BEARINGS AND SHAFT

An upper radial and lower thrust bearing shall be required. These shall be heavy duty single row ball bearings which are permanently and continuously lubricated and cooled by the dielectric oil which fills the motor housing. The motor shaft shall be stainless steel and sealed from the pumped liquid with a carbon ceramic mechanical seal.

7.01 SEALS AND SENSORS

The rotor and stator in the motor housing shall be separated and protected from the pumped liquid by an oil filled housing incorporating two type 21 carbon ceramic mechanical seals mounted in tandem. This seal housing shall be equipped with a moisture sensing probe installed between the seals, and the sensing of moisture in the seal chamber shall be automatic, continuous and not require the pump be stopped or removed from the wet well.

8.01 EXCEPTIONS (SENSOR)

The seal failure sensor is optional on single phase automatic and single phase manual pumps.

9.01 IMPELLER

The Impeller shall be high capacity, semi-open non-clog design with pump out vanes on the back side. These vanes wash out grit and stringy material that will damage the shaft and mechanical seal.

10.01 AUTOMATIC CONTROL

All single phase pumps should be capable of automatic operation.

11.01 MANUAL CONTROL

The Single Phase SKHD150 pump is not supplied with any type of automatic control. A super or double wide angle piggy-back float switch can be supplied and fitted to this pump.

12.01 PAINTING

All cast iron parts shall be painted before assembly with a water reducible alkyd air dried enamel. The paint shall be applied in one coat with a minimum thickness of 3 to 4 mils.

13.01 TESTING

All pumps shall be individually tested to include the following:

1. The pump and power cord shall be visually inspected for imperfections, cuts or nicks.
2. The pump shall have a ground continuity check and the motor chamber shall be Hi-potted to test for moisture content and/or insulation defects.
3. The motor and volute housing shall be pressurized and a 10 second air leak decay test run.
4. Oil is added, and the pump is run. Voltage and current are monitored visually, electronically, and the tester listens for any noise or malfunction.