

# STA-RITE® HS Series Signature 2000®

Stainless Steel



POWERED BY  
**PENTEK®**



**Precision-engineered, high-quality, rugged Signature 2000® Stainless Steel Series Pumps deliver efficient, dependable performance even in rough, aggressive water. Heads to 1,950 feet and capacities to 65 GPM. Built to deliver long-term, trouble-free service. Floating impeller design resists sand and reduces sand locking. These pumps feature the proven SignaSeal™ staging system.**

## APPLICATIONS

**Water systems...**for residential, industrial, commercial, multiple housing and farm use.

## SPECIFICATIONS

**Shell:** Stainless steel

**Diameter:** 3-7/8"

**Discharge:** Stainless steel

**Discharge Bearing:** Nylatron®

**Intermediate Bearing:** (On larger units) polycarbonate, nitrile rubber and stainless steel

**Impellers:** Acetal

**Diffusers:** Polycarbonate

**Suction Caps:** Polycarbonate with stainless steel insert

**Thrust Pads:** Proprietary spec.

**Shaft and Coupling:** Stainless steel

**Intake:** Stainless steel

**Intake Screen:** Polypropylene

**Cable Guard:** Stainless steel

**Check Valve:** Acetal†

**Agency Listings:** CSA

## FEATURES

**Proven Staging System:** Our proven SignaSeal staging system incorporates a harder-than-sand ceramic wear surface that when incorporated with our floating impeller design, greatly reduces problems with abrasives, sand lock-up and running dry.

**Discharge:** Corrosion-resistant 300 grade stainless steel for durability in aggressive water. Large octagon wrench area for ease of installation.

**Discharge Bearing:** Self-lubricating Nylatron bearing resists wear from sand.

**Intake:** Corrosion-resistant 300 grade stainless steel for durability in aggressive water.

**Shaft:** Positive drive from 7/16" hexagonal heavy-duty 300 grade stainless steel.

**Coupling:** Stainless steel press fit to pump shaft. Couples to all standard NEMA motors.

**Shell:** Highest grade, heavy-walled corrosion-resistant stainless steel. Threaded for easy servicing.

**Hardware:** All screws, washers and nuts are corrosion-resistant 300 grade stainless steel.

**Check Valve:** Durable internal spring-loaded check valve.

**Cable Guard:** Corrosion-resistant stainless steel guard protects motor leads. Tapered ends prevent pump from catching on well.

**Intake Screen:** Corrosion-proof.

**Pentek® XE Series™ Motor:** 2 and 3 wire NEMA standard all stainless construction water-filled motors.

†Except where noted.

Pentair trademarks and logos are owned by Pentair plc or its affiliates. All other third party registered and unregistered trademarks and logos are the property of their respective owners.

# STA-RITE® HS Series Signature 2000®

Stainless Steel

ORDERING INFORMATION															
GPM	MOTOR TYPE	HP	STGS.	PH†	VOLT	ASSEMBLED PUMP			PUMP END			MOTOR		CONTROL BOX	
						CATALOG NUMBER	LENGTH INCHES*	WEIGHT POUNDS*	CATALOG NUMBER	LENGTH INCHES*	WEIGHT POUNDS*	CATALOG NUMBER	WEIGHT POUNDS*	CATALOG NUMBER	WEIGHT POUNDS*
10**	2 WIRE	1/2	8	1	115	S10P4HS05121	23	28	L10P4CH	13	9	P42B0005A1	19		
		1/2	8	1	230	S10P4HS05221	23	28	L10P4CH	13	9	P42B0005A2	19		
		3/4	11	1	230	S10P4HS07221	26	31	L10P4DH	15	10	P42B0007A2	23		
		1	13	1	230	S10P4HS10221	29	35	L10P4EH	17	11	P42B0010A2	25		
		1-1/2	17	1	230	S10P4HS15221	35	42	L10P4FH	20	12	P42B0015A2	29		
	3 WIRE	1/2	7	1	115	S10P4HS05131	22-3/4	27-1/2	L10P4CH	12-3/4	9	P43B0005A1	19	SMC-IR0511	4
		1/2	8	1	230	S10P4HS05231	23	28	L10P4CH	13	9	P43B0005A2	19	SMC-CR0521	4
		3/4	11	1	230	S10P4HS07231	26	31	L10P4DH	15	10	P43B0007A2	21	SMC-CR0721	4
		1	13	1	230	S10P4HS10231	29	35	L10P4EH	17	11	P43B0010A2	23	SMC-CR1021	4
		1-1/2	17	1	230	S10P4HS15231	34	42	L10P4FH	20	12	P43B0015A2	27	SMC-CR1521	7
		1-1/2	17	3	230				L10P4FH	19-3/4	12-1/2	P43B0015A3	23		
		1-1/2	17	3	460				L10P4FH	19-3/4	12-1/2	P43B0015A4	23		
		2	22	1	230				L10P4GH	22	13-3/4	P43B0020A2	31	SMC-CR2021	7
		2	22	3	230				L10P4GH	22	13-3/4	P43B0020A3	23		
		2	22	3	460				L10P4GH	22	13-3/4	P43B0020A4	23		
		3	30	1	230				L10P4HH	22	16-3/4	P43B0030A2	40	SMC-CR3021	8
		3	30	3	230				L10P4HH	28	16-3/4	P43B0030A3	32		
		3	30	3	460				L10P4HH	28	16-3/4	P43B0030A4	32		
		5	50	1	230				L10P4JH	43-1/2	25-1/2	P43B0050A2	70	SMC-CR5021	12
		5	50	3	230				L10P4JH	43-1/2	25-1/2	P43B0050A3	55		
5	50	3	460				L10P4JH	43-1/2	25-1/2	P43B0050A4	55				
15**	2 WIRE	1/2	6	1	115	S15P4HS05121	23	27	L15P4CH	13	9	P42B0005A1	19		
		1/2	6	1	230	S15P4HS05221	23	27	L15P4CH	13	9	P42B0005A2	19		
		3/4	8	1	230	S15P4HS07221	26	31	L15P4DH	15	10	P42B0007A2	23		
		1	10	1	230	S15P4HS10221	30	35	L15P4EH	17	11	P42B0010A2	25		
		1-1/2	12	1	230	S15P4HS15221	36	43	L15P4FH	21	13	P42B0015A2	29		
	3 WIRE	1/2	5	1	115	S15P4HS05131	22-1/4	27	L15P4CH	12-1/4	9	P43B0005A1	19	SMC-IR0511	4
		1/2	6	1	230	S15P4HS05231	23	27	L15P4CH	13	9	P43B0005A2	19	SMC-CR0521	4
		3/4	8	1	230	S15P4HS07231	26	31	L15P4DH	15	10	P43B0007A2	23	SMC-CR0721	4
		1	10	1	230	S15P4HS10231	30	35	L15P4EH	17	11	P43B0010A2	25	SMC-CR1021	4
		1-1/2	12	1	230	S15P4HS15231	34	41	L15P4FH	21	13	P43B0015A2	29	SMC-CR1521	7
		1-1/2	12	3	230				L15P4FH	20-1/4	13	P43B0015A3	23		
		1-1/2	12	3	460				L15P4FH	20-1/4	13	P43B0015A4	23		
		2	15	1	230				L15P4GH	23-1/2	15	P43B0020A2	31	SMC-CR2021	7
		2	15	3	230				L15P4GH	23-1/2	15	P43B0020A3	23		
		2	15	3	460				L15P4GH	23-1/2	15	P43B0020A4	23		
		3	22	1	230				L15P4HH	31-1/4	18	P43B0030A2	40	SMC-CR3021	7
		3	22	3	230				L15P4HH	31-1/4	18	P43B0030A3	32		
		3	22	3	460				L15P4HH	31-1/4	18	P43B0030A4	32		

†For all Pentek XE series three-phase motor options, see page 65.

\*Length and Weight are approximate.

\*\*For 10 GPM, 15 GPM and 20 GPM discharge is 1-1/4" NPT.

\*\*\*For 30 GPM and 50 GPM discharge is 2" NPT.

NOTE: On 2 HP and larger – Pump, Motor, Control Box or Magnetic Starter must be ordered separately.

†Check Valve not included on 5 HP, 7-1/2 HP and 10 HP models. Check Valve not included on 50 GPM models.

TrimLine™ version maximum outside diameter is 3-3/4". Standard version maximum outside diameter on all models is 3-7/8".

# STA-RITE® HS Series Signature 2000®

Stainless Steel

ORDERING INFORMATION															
GPM	MOTOR TYPE	HP	STGS.	PH†	VOLT	ASSEMBLED PUMP			PUMP END			MOTOR		CONTROL BOX	
						CATALOG NUMBER	LENGTH INCHES*	WEIGHT POUNDS*	CATALOG NUMBER	LENGTH INCHES*	WEIGHT POUNDS*	CATALOG NUMBER	WEIGHT POUNDS*	CATALOG NUMBER	WEIGHT POUNDS*
20**	2 WIRE	3/4	6	1	230	S20P4HS07221	24	30	L20P4DH	13	9	P42B0007A2	23		
		1	7	1	230	S20P4HS10221	28	34	L20P4EH	15	10	P42B0010A2	25		
		1-1/2	10	1	230	S20P4HS15221	32	39	L20P4FH	17	11	P42B0015A2	29		
	3 WIRE	3/4	6	1	230	S20P4HS07231	24	30	L20P4DH	13	9	P43B0007A2	23	SMC-CR0721	5
		1	7	1	230	S20P4HS10231	28	34	L20P4EH	15	10	P43B0010A2	25	SMC-CR1021	5
		1-1/2	10	1	230	S20P4HS15231	31	39	L20P4FH	17	11	P43B0015A2	29	SMC-CR1521	7
		1-1/2	9	3	230				L20P4FH	16-3/4	10-3/4	P43B0015A3	23		
		1-1/2	9	3	460				L20P4FH	16-3/4	10-3/4	P43B0015A4	23		
		2	12	1	230				L20P4GH	20-1/4	12-1/2	P43B0020A2	31	SMC-CR2021	7
		2	12	3	230				L20P4GH	20-1/4	12-1/2	P43B0020A3	32		
		2	12	3	460				L20P4GH	20-1/4	12-1/2	P43B0020A4	32		
		3	17	1	230				L20P4HH	25-3/4	15	P43B0030A2	40	SMC-CR3021	7
		3	17	3	230				L20P4HH	25-3/4	15	P43B0030A3	32		
		3	17	3	460				L20P4HH	25-3/4	15	P43B0030A4	32		
		5	28	1	230				L20P4JH	38	21	P43B0050A2	70	SMC-CR5021	8
		5	28	3	230				L20P4JH	38	21	P43B0050A3	55		
		5	28	3	460				L20P4JH	38	21	P43B0050A4	55		
		7-1/2	40	3	230				L20P4KH	53-3/4	30	P43B0075A3	70		
		7-1/2	40	3	460				L20P4KH	53-3/4	30	P43B0075A4	70		
		10	54	3	460				L20P4LH	71	41	P43B0100A4	78		
30***	2 WIRE	1	5	1	230	S30P4HS10221	26-1/2	35	L30P4EH	14	9-3/4	P42B0010A2	25		
		1-1/2	6	1	230	S30P4HS15221	30-1/2	39	L30P4FH	15-1/4	10-3/4	P42B0015A2	29		
	3 WIRE	1	5	1	230	S30P4HS10231	26-1/2	35	L30P4EH	14	10	P43B0010A2	25	SMC-CR1021	5
		1-1/2	6	1	230	S30P4HS15231	29	39	L30P4FH	15-1/4	11	P43B0015A2	29	SMC-CR-1521	7
		1-1/2	6	3	230				L30P4FH	15-1/4	11	P43B0015A3	23		
		1-1/2	6	3	460				L30P4FH	15-1/4	11	P43B0015A4	23		
		2	8	1	230				L30P4GH	18-1/4	12	P43B0020A2	31	SMC-CR2021	7
		2	8	3	230				L30P4GH	18-1/4	12	P43B0020A3	23		
		2	8	3	460				L30P4GH	18-1/4	12	P43B0020A4	23		
		3	12	1	230				L30P4HH	24	15	P43B0030A2	40	SMC-CR3021	7
		3	12	3	230				L30P4HH	24	15	P43B0030A3	32		
		3	12	3	460				L30P4HH	24	15	P43B0030A4	32		
		5	20	1	230				L30P4JH	35-3/4	20	P43B0050A2	70	SMC-CR5021	8
		5	20	3	230				L30P4JH	35-3/4	20	P43B0050A3	55		
		5	20	3	460				L30P4JH	35-3/4	20	P43B0050A4	55		
		7-1/2	28	3	230				L30P4KH	50	27	P43B0075A3	70		
		7-1/2	28	3	460				L30P4KH	50	27	P43B0075A4	70		
10	38	3	460				L30P4LH	65-1/2	35	P43B0100A4	70				

†For all Pentek XE series three-phase motor options, see page 65.

\*Length and Weight are approximate.

\*\*For 10 GPM, 15 GPM and 20 GPM discharge is 1-1/4" NPT.

\*\*\*For 30 GPM and 50 GPM discharge is 2" NPT.

NOTE: On 2 HP and larger – Pump, Motor, Control Box or Magnetic Starter must be ordered separately.

†Check Valve not included on 5 HP, 7-1/2 HP and 10 HP models. Check Valve not included on 50 GPM models.

TrimLine™ version maximum outside diameter is 3-3/4". Standard version maximum outside diameter on all models is 3-7/8".

# STA-RITE® HS Series Signature 2000®

Stainless Steel

ORDERING INFORMATION												
GPM	MOTOR TYPE	HP	STGS.	PH†	VOLT	PUMP END			MOTOR		CONTROL BOX	
						CATALOG NUMBER	LENGTH INCHES*	WEIGHT POUNDS*	CATALOG NUMBER	WEIGHT POUNDS*	CATALOG NUMBER	WEIGHT POUNDS*
50***	2 WIRE	1-1/2	4	1	230	L50P4FH	15-1/4	10	P42B0015A2	29		
	3 WIRE	1-1/2	4	1	230	L50P4FH	15-1/4	10	P43B0015A2	27	SMC-CR1521	7
		1-1/2	4	3	230	L50P4FH	15-1/4	10	P43B0015A3	23		
		1-1/2	4	3	460	L50P4FH	15-1/4	10	P43B0015A4	23		
		2	6	1	230	L50P4GH	19-1/4	12	P43B0020A2	31	SMC-CR2021	7
		2	6	3	230	L50P4GH	19-1/4	12	P43B0020A3	27		
		2	6	3	460	L50P4GH	19-1/4	12	P43B0020A4	27		
		3	8	1	230	L50P4HH	23-1/4	15	P43B0030A2	40	SMC-CR3021	7
		3	8	3	230	L50P4HH	23-1/4	15	P43B0030A3	32		
		3	8	3	460	L50P4HH	23-1/4	15	P43B0030A4	32		
		5	13	1	230	L50P4JH	33-1/2	20	P43B0050A2	70	SMC-CR5021	8
		5	13	3	230	L50P4JH	33-1/2	20	P43B0050A3	55		
		5	13	3	460	L50P4JH	33-1/2	20	P43B0050A4	55		
		7-1/2	20	3	230	L50P4KH	47-1/2	25	P43B0075A3	70		
		7-1/2	20	3	460	L50P4KH	47-1/2	25	P43B0075A4	70		
10	25	3	460	L50P4LH	57-3/4	35	P43B0100A4	70				

†For all Pentek XE series three-phase motor options, see page 65.

\*Length and Weight are approximate.

\*\*For 10 GPM, 15 GPM and 20 GPM discharge is 1-1/4" NPT.


\*\*\*For 30 GPM and 50 GPM discharge is 2" NPT.

NOTE: Pump, Motor, Control Box or Magnetic Starter must be ordered separately.  
Check Valve not included on 50 GPM models.

# STA-RITE® HS Series Signature 2000®


Stainless Steel

## OUTLINE DIMENSIONS: 10, 15 AND 20 GPM

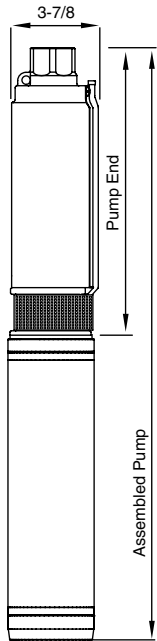

DISCHARGE	
10 GPM	1-1/4" NPT
15 GPM	1-1/4" NPT
20 GPM	1-1/4" NPT

## OUTLINE DIMENSIONS: 30 AND 50 GPM

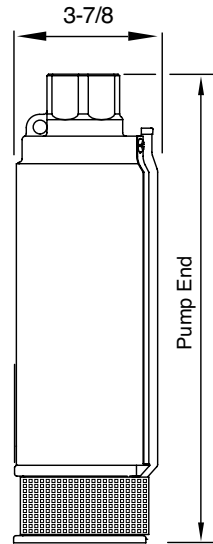


DISCHARGE	
30 GPM	2" NPT
50 GPM	2" NPT

For lengths, refer to Ordering Information tables.  
Dimensions (in inches) are for estimating purposes only.

Pump diameter is 3-7/8".  
For lengths, refer to Ordering Information tables.  
Dimensions (in inches) are for estimating purposes only.

## PUMP PERFORMANCE: 10 GPM

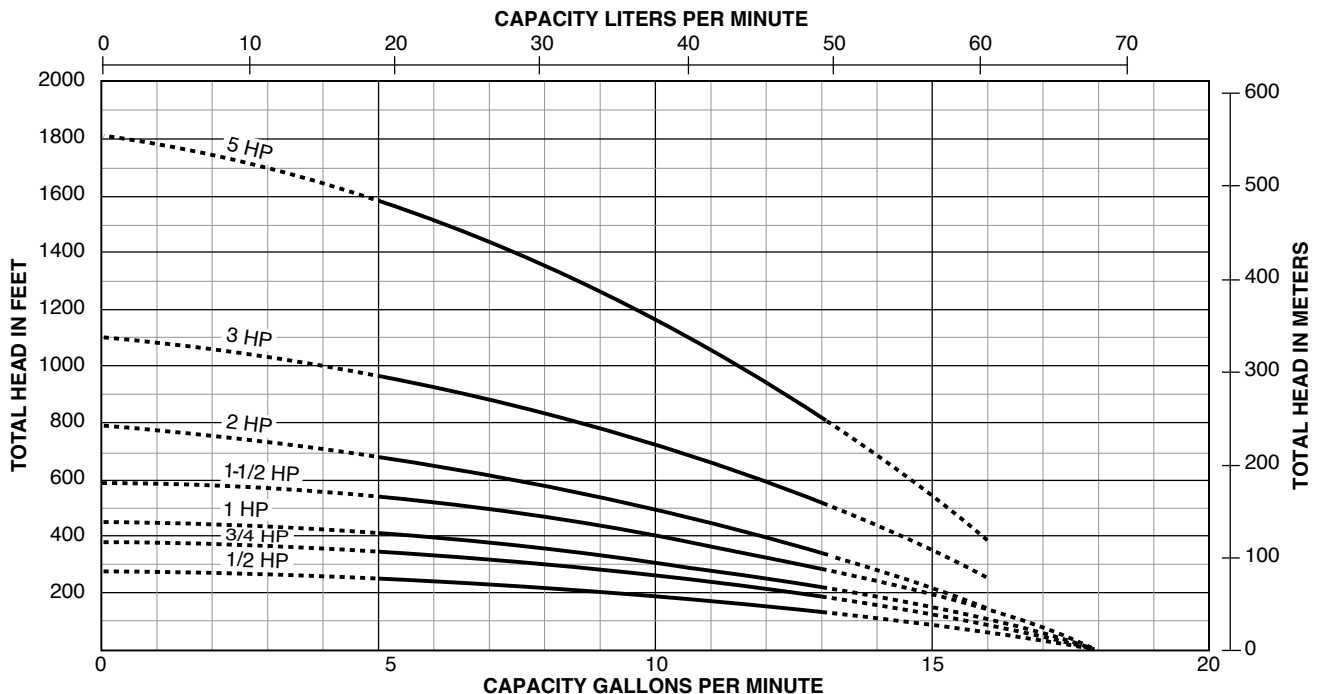


Tested and rated in accordance with Water Systems Council Standards.

NOTE: Pumps installed with a Pro-Source® tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.


# STA-RITE® HS Series Signature 2000®

Stainless Steel

## PUMP PERFORMANCE: 15 GPM

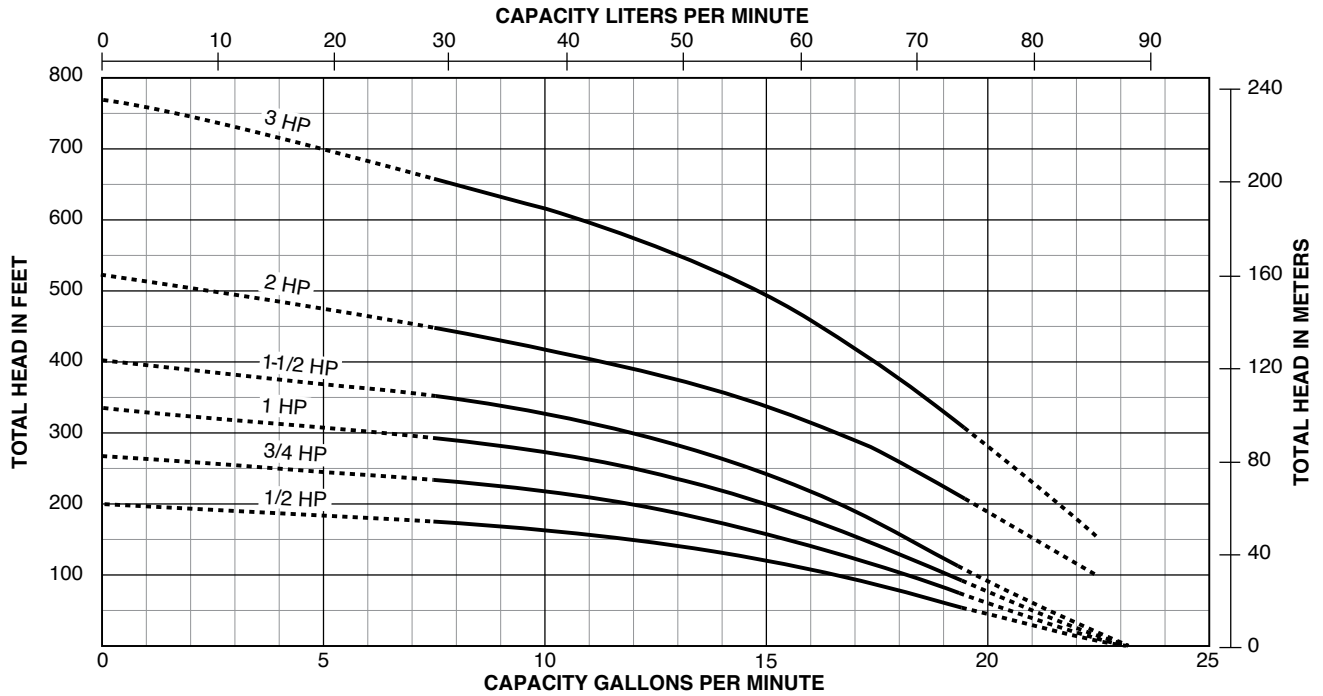

## PUMP PERFORMANCE: 20 GPM

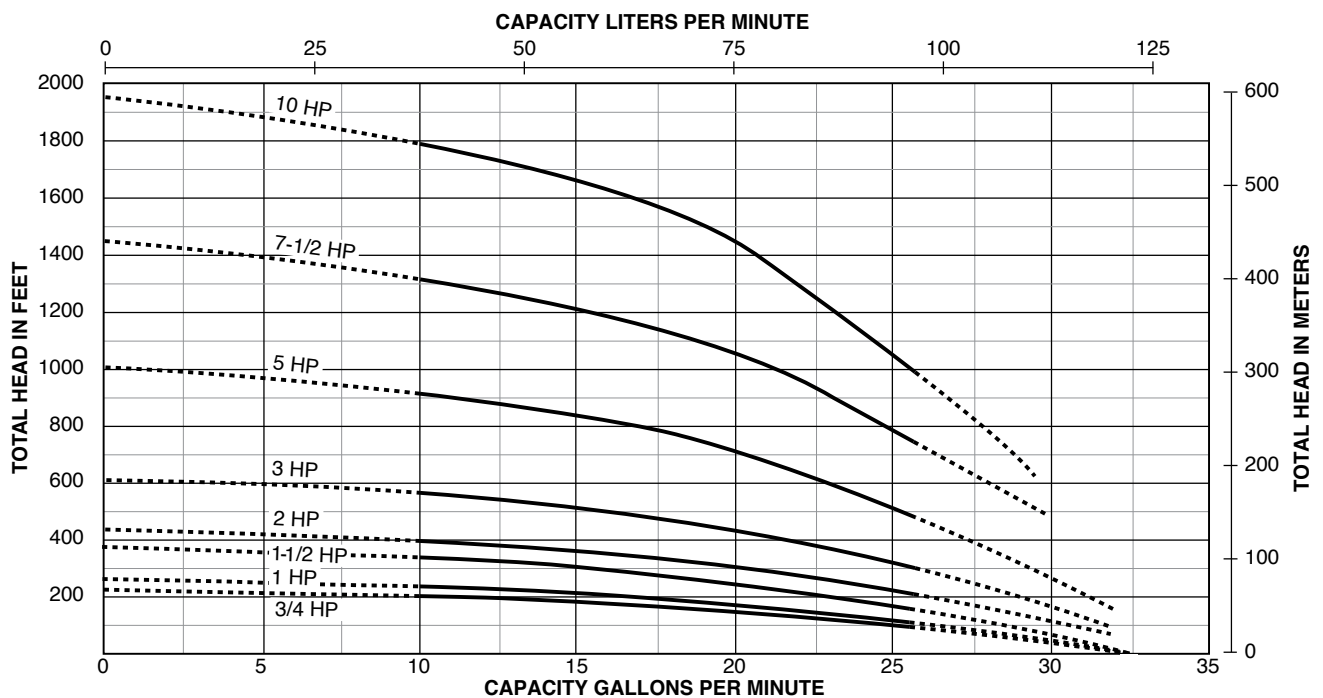


Tested and rated in accordance with Water Systems Council Standards.

NOTE: Pumps installed with a Pro-Source® tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.


# STA-RITE® HS Series Signature 2000®

Stainless Steel

## PUMP PERFORMANCE: 30 GPM

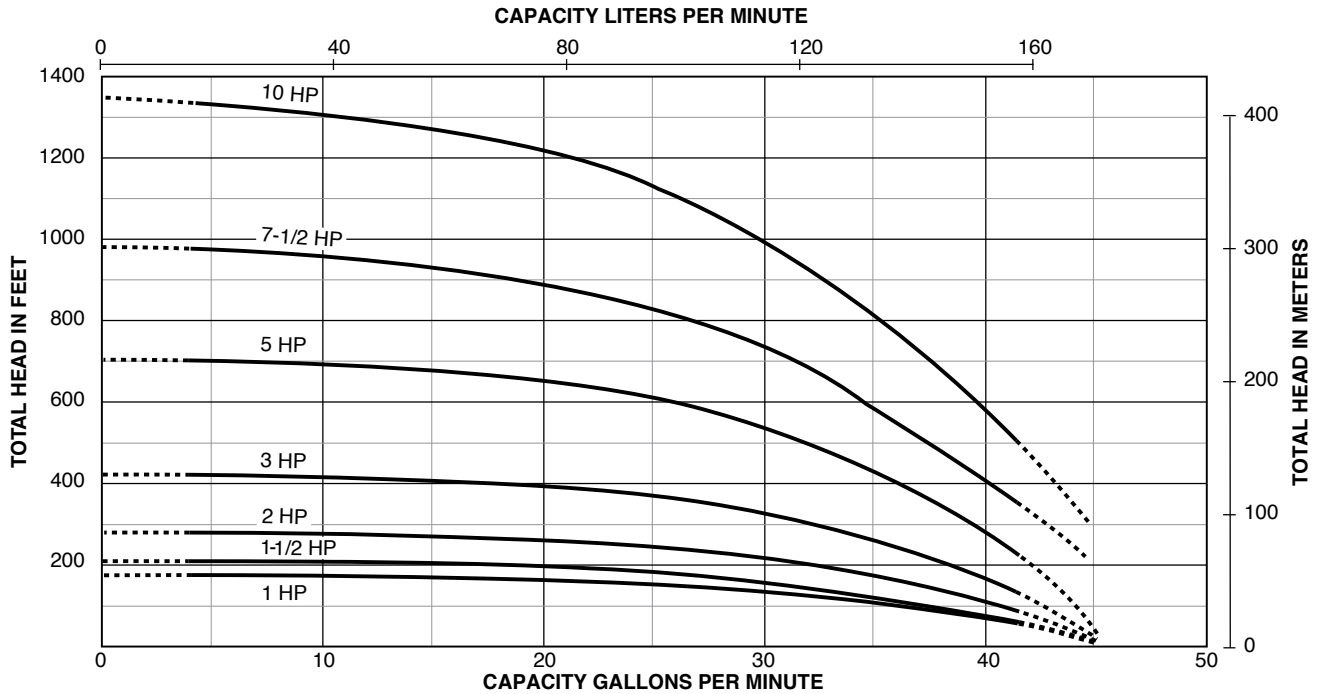

## PUMP PERFORMANCE: 50 GPM

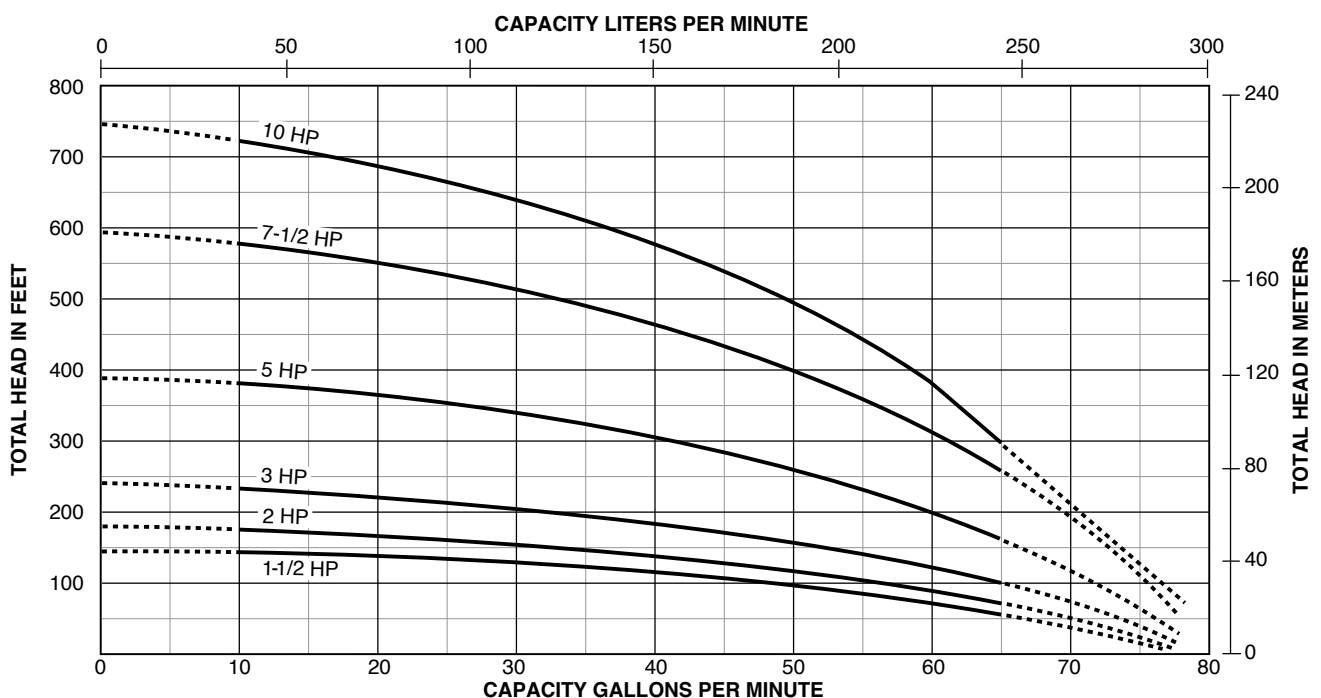

Tested and rated in accordance with Water Systems Council Standards.

NOTE: Pumps installed with a Pro-Source® tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.





# STA-RITE® HS Series Signature 2000®

Stainless Steel

15 GALLONS PER MINUTE																		PUMP PERFORMANCE (Capacity in gallons per minute)											SHUT-OFF HEAD	
HP	PSI	PUMPING DEPTH IN FEET																		SHUT-OFF HEAD										
		0	20	40	60	80	100	120	140	160	180	200	220	240	260	280	300	320	340	360	380	400	FEET	PSI						
1/2	0	—	—	20.5	19.2	17.8	16.3	14.7	12.8	10.5	7.5													201	87					
	20	20.1	18.8	17.4	15.8	14.1	12.1	9.7	6.2																					
	30	18.6	17.1	15.6	13.8	11.8	9.2	5.5																						
	40	16.9	15.3	13.5	11.4	8.8	4.6																							
	50	15.1	13.2	11.0	8.3	3.4																								
	60	12.9	10.7	7.8																										
	70	10.3	7.2																											
	80	6.6																												
3/4	0	—	—	—	20.2	19.2	18.2	17.1	15.9	14.7	13.3	11.7	9.8	7.5	3.6															
	20	20.8	19.9	18.9	17.9	16.7	15.5	14.2	12.8	11.2	9.2	6.6																		
	30	19.7	18.7	17.7	16.6	15.4	14.0	12.6	10.9	8.8	6.1																			
	40	18.6	17.5	16.4	15.2	13.8	12.3	10.6	8.5	5.5																				
	50	17.3	16.2	15.0	13.6	12.1	10.3	8.1	4.8																					
	60	16.0	14.8	13.4	11.8	10.0	7.7	4.0																						
	70	14.5	13.1	11.5	9.7	7.3	3.0																							
	80	12.9	11.3	9.3	6.8																									
1	0	—	—	—	—	20.4	19.6	18.7	17.8	16.9	15.9	14.8	13.6	12.3	10.9	9.3	7.3	4.5												
	20	—	21.0	20.2	19.3	18.5	17.5	16.6	15.5	14.4	13.2	11.9	10.4	8.7	6.6	3.2														
	30	20.9	20.1	19.2	18.3	17.4	16.4	15.4	14.3	13.0	11.7	10.2	8.4	6.2	2.4															
	40	19.9	19.1	18.2	17.3	16.3	15.2	14.1	12.8	11.5	9.9	8.1	5.7																	
	50	18.9	18.0	17.1	16.1	15.0	13.9	12.6	11.3	9.7	7.8	5.3																		
	60	17.9	17.0	15.9	14.9	13.7	12.4	11.0	9.4	7.5	4.8																			
	70	16.8	15.8	14.7	13.5	12.2	10.8	9.1	7.1	4.2																				
	80	15.6	14.5	13.3	12.0	10.6	8.8	6.7	3.6																					
1-1/2	0	—	—	—	—	20.5	19.9	19.2	18.5	17.8	17.1	16.3	15.5	14.7	13.7	12.8	11.7	10.5	9.1	7.5	5.3									
	20	—	20.9	20.3	19.7	19.0	18.3	17.6	16.9	16.1	15.3	14.4	13.4	12.4	11.3	10.1	8.7	6.9	4.3											
	30	20.8	20.2	19.6	18.9	18.2	17.5	16.7	16.0	15.1	14.2	13.3	12.3	11.2	9.9	8.4	6.6	3.8												
	40	20.1	19.5	18.8	18.1	17.4	16.6	15.8	15.0	14.1	13.1	12.1	11.0	9.7	8.2	6.2	3.0													
	50	19.4	18.7	18.0	17.3	16.5	15.7	14.9	14.0	13.0	11.9	10.8	9.5	7.9	5.9	1.8														
	60	18.6	17.9	17.1	16.4	15.6	14.7	13.8	12.8	11.8	10.6	9.2	7.6	5.5																
	70	17.8	17.0	16.3	15.4	14.6	13.7	12.7	11.6	10.4	9.0	7.3	5.1																	
	80	16.9	16.1	15.3	14.4	13.5	12.5	11.4	10.2	8.8	7.0	4.6																		
HP	PSI	PUMPING DEPTH IN FEET																		SHUT-OFF HEAD										
		20	40	60	80	100	125	150	175	200	250	300	350	400	450	500	550	600	650	700	750	800	FEET	PSI						
2	0	—	—	—	—	—	—	20.7	20.2	19.6	18.3	16.9	14.4	11.6	7.4	2.7														
	20	—	—	—	21.2	20.9	20.2	19.7	19.1	18.4	17.0	14.7	11.8	7.8	3.2															
	30	—	—	21.2	20.8	20.3	19.7	19.1	18.5	17.9	16.1	13.5	10.2	5.5																
	40	—	21.1	20.6	20.2	19.8	19.2	18.6	17.9	17.1	14.9	12.0	8.1	3.4																
	50	21.1	20.6	20.1	19.7	19.2	18.6	17.9	17.1	16.2	13.6	10.8	6.0																	
	60	20.5	20.1	19.6	19.1	18.7	18.0	17.2	16.2	15.1	12.2	8.6	3.7																	
3	0	—	—	—	—	—	—	—	—	21.0	20.2	19.5	18.7	17.8	16.6	15.0	13.0	10.8	8.0	4.9	1.6									
	20	—	—	—	—	—	21.1	20.8	20.3	19.5	18.8	17.9	16.7	15.1	13.2	11.1	8.3	5.2	1.9											
	30	—	—	—	—	21.2	20.8	20.3	19.9	19.2	18.3	17.4	16.1	14.3	12.2	10.4	7.0	3.5	3.6											
	40	—	—	—	21.6	21.2	20.9	20.4	19.9	19.6	18.8	18.0	16.8	15.2	13.4	11.2	8.4	5.4	2.1											
	50	—	—	21.6	21.1	20.9	20.4	20.0	19.7	19.2	18.4	17.5	16.2	14.4	12.3	10.5	7.1	3.8												
	60	—	21.4	21.1	20.8	20.5	20.0	19.7	19.3	18.9	18.0	16.9	15.3	13.5	11.4	8.8	5.5													

CAUTION: DO NOT use pump at flow rates indicated by the symbol '—'. To do so can cause premature failure of unit. Pump warranty void when failure occurs under these conditions.

Tested and rated in accordance with Water Systems Council Standards.

NOTE: Pumps installed with a Pro-Source® tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.



# STA-RITE® HS Series Signature 2000®

Stainless Steel

30 GALLONS PER MINUTE										PUMP PERFORMANCE (Capacity in gallons per minute)										SHUT-OFF HEAD					
HP	PSI	PUMPING DEPTH IN FEET																		FEET	PSI				
		20	40	60	80	100	125	150	175	200	250	300	350	400	450	500	550	600	650			700			
1	0	—	42.5	40.9	39.1	36.8	32.5	26.0	8.0												175	76			
	20	40.4	38.8	36.0	32.4	27.7	13.3																		
	30	38.0	35.3	31.7	26.3	14.3																			
	40	35.0	31.4	25.9	12.1																				
	50	30.2	24.0	3.0																					
	60	21.9																							
1-1/2	0	—	—	41.9	39.9	37.5	34.1	30.9	26.9	17.0											210	91			
	20	41.2	39.1	36.5	34.0	31.5	27.8	21.5																	
	30	38.9	36.1	33.8	31.0	27.9	21.8																		
	40	36.0	33.5	30.8	27.7	20.2																			
	50	32.9	30.1	26.8	21.5																				
	60	29.5	25.9	18.1																					
2	0	—	—	—	41.8	40.5	38.8	36.8	34.7	31.6	23.7										280	121			
	20	—	41.3	40.1	38.7	37.1	34.9	32.1	29.0	24.8															
	30	41.2	40.0	38.5	37.0	35.0	32.2	29.1	24.9	15.2															
	40	39.9	38.3	36.6	34.8	32.7	29.8	25.1	16.1																
	50	38.0	36.3	34.5	32.1	30.0	25.3	17.5																	
	60	36.0	34.0	31.9	29.1	26.0	18.0																		
3	0	—	—	—	—	42.7	41.6	40.1	39.6	38.2	35.5	32.0	27.3								420	182			
	20	—	—	42.4	41.5	41.0	39.8	38.5	37.1	35.7	32.1	28.0	18.5												
	30	42.9	42.2	41.3	40.6	39.9	38.7	37.2	35.8	34.2	30.3	24.9	6.0												
	40	42.1	41.2	40.4	39.7	38.8	37.3	35.9	34.5	32.6	28.3	19.9													
	50	41.1	40.3	39.5	38.5	37.4	36.0	34.6	32.7	31.0	25.2	9.5													
	60	40.2	39.3	38.3	37.2	36.1	34.7	32.8	31.0	28.5	20.5														
5	0	—	—	—	—	—	—	—	42.6	42.0	40.7	39.2	38.0	36.0	34.2	31.9	29.2	26.0	20.0		705	305			
	20	—	—	—	—	—	42.7	42.0	41.3	40.8	39.3	38.2	36.2	34.4	32.4	30.0	26.1	21.5							
	30	—	—	—	—	42.8	42.1	41.4	40.8	40.1	38.7	37.0	35.1	33.1	31.1	26.0	24.1	16.0							
	40	—	—	—	—	42.1	41.5	40.9	40.2	39.3	37.9	36.1	34.3	32.0	29.4	26.2	20.4								
	50	—	—	42.6	42.0	41.5	41.2	40.2	39.5	38.8	37.1	35.4	33.2	31.2	28.8	24.5	16.0								
	60	—	42.5	42.0	41.4	41.1	40.3	39.8	38.9	38.1	36.2	34.2	32.1	30.0	26.7	22.0									
HP	PSI	PUMPING DEPTH IN FEET														SHUT-OFF HEAD									
		200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	FEET	PSI									
7-1/2	0	—	—	40.4	37.6	34.8	32.0	28.1	20.0												975	422			
	20	—	42.0	39.3	36.5	33.8	30.5	25.5	13.8																
	30	—	41.3	38.6	35.8	33.1	29.8	23.3	6.5																
	40	—	40.7	38.1	35.6	32.6	29.3	21.7																	
	50	42.7	40.1	37.3	34.6	31.7	27.4	19.3																	
	60	42.0	39.4	36.5	33.7	30.7	25.1	13.9																	
10	0	—	—	—	41.3	39.5	37.3	35.1	33.1	30.4	27.1	22.5	11.9								1345	582			
	20	—	—	42.3	40.5	38.6	36.4	34.5	31.8	29.2	25.3	18.7													
	30	—	—	42.0	40.1	43.0	35.7	33.7	31.3	28.4	24.2	16.3													
	40	—	—	41.6	39.7	37.7	35.5	33.5	30.9	27.7	23.4	14.4													
	50	—	42.7	41.0	39.3	37.1	34.9	32.8	30.2	26.7	21.7	7.7													
	60	—	42.3	40.6	38.7	36.5	34.5	32.3	29.5	25.7	20.1	5.0													

CAUTION: DO NOT use pump at flow rates indicated by the symbol '—'. To do so can cause premature failure of unit. Pump warranty void when failure occurs under these conditions. Tested and rated in accordance with Water Systems Council Standards.

NOTE: Pumps installed with a Pro-Source® tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.

# STA-RITE® HS Series Signature 2000®

Stainless Steel

50 GALLONS PER MINUTE																	PUMP PERFORMANCE (Capacity in gallons per minute)		
HP	PSI	PUMPING DEPTH IN FEET															SHUT-OFF HEAD		
		20	40	60	80	100	125	150	175	200	250	300	350	450	550	650	700	FEET	PSI
1-1/2	0	—	—	—	58.2	49.3	33.5											145	63
	20	—	55.9	46.5	32.5														
	30	54.8	45.0	30.0															
	40	43.3	26.9																
	50	21.9																	
	60																		
2	0	—	—	—	63.3	57.0	47.8	33.9										180	78
	20	—	62.2	55.1	46.8	37.1	13.0												
	30	61.1	53.6	46.0	34.3	14.1													
	40	52.8	45.0	32.5	11.0														
	50	42.7	27.9																
	60	25.2																	
3	0	—	—	—	—	64.5	59.4	52.5	45.0	33.8								235	102
	20	—	—	63.7	59.0	53.5	46.5	36.2	18.2										
	30	—	62.9	58.1	53.0	47.0	37.0	20.5											
	40	62.5	57.6	52.0	46.2	38.8	22.1												
	50	56.5	51.0	44.7	36.2	22.8													
	60	50.0	43.7	34.0	20.5														
5	0	—	—	—	—	—	—	65.9	63.2	59.9	51.9	41.9	22.5					385	166
	20	—	—	—	—	—	63.5	60.8	56.1	52.4	42.5	24.9							
	30	—	—	—	—	63.8	60.9	56.9	53.0	47.9	35.5	12.9							
	40	—	—	65.5	63.2	61.0	57.0	53.2	48.0	43.5	27.0								
	50	—	65.1	63.0	60.8	57.1	53.3	48.1	43.6	36.4	14.2								
	60	64.9	62.4	60.0	56.9	53.7	48.7	44.1	37.5	28.0									
7-1/2	0	—	—	—	—	—	—	—	—	—	66.0	61.0	55.3	43.1	20.0			595	257
	20	—	—	—	—	—	—	—	—	64.8	61.1	56.0	50.0	34.9					
	30	—	—	—	—	—	—	—	64.9	63.3	58.7	53.2	47.2	28.8					
	40	—	—	—	—	—	—	65.0	63.6	61.7	56.2	50.9	44.1	22.0					
	50	—	—	—	—	—	65.1	63.7	61.8	58.9	53.9	47.5	41.0	13.2					
	60	—	—	—	—	65.2	63.8	61.9	59.0	56.5	51.1	44.9	36.0						
10	0	—	—	—	—	—	—	—	—	—	65.0	62.1	54.2	44.7	29.0	15.2		745	322
	20	—	—	—	—	—	—	—	—	65.5	62.5	59.1	50.1	39.2	17.1				
	30	—	—	—	—	—	—	—	66.9	64.1	61.2	56.9	47.5	35.0	10.5				
	40	—	—	—	—	—	—	67.0	65.8	63.0	59.3	54.9	45.2	30.5					
	50	—	—	—	—	—	67.1	65.9	64.2	61.5	57.2	53.0	42.9	25.0					
	60	—	—	—	—	67.2	66.0	64.3	63.2	59.9	55.0	51.0	40.6	19.7					

CAUTION: DO NOT use pump at flow rates indicated by the symbol '—'. To do so can cause premature failure of unit. Pump warranty void when failure occurs under these conditions.

Tested and rated in accordance with Water Systems Council Standards.

NOTE: Pumps installed with a Pro-Source® tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.



US: 293 WRIGHT STREET, DELAVAN, WI 53115 WWW.STA-RITE.COM PH: 888-782-7483 ORDERS FAX: 800-426-9446

CANADA: 490 PINEBUSH ROAD, UNIT 4, CAMBRIDGE, ONTARIO N1T 0A5 PH: 800-363-7867 ORDERS FAX: 888-606-5484

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.